


RoHS Compliant

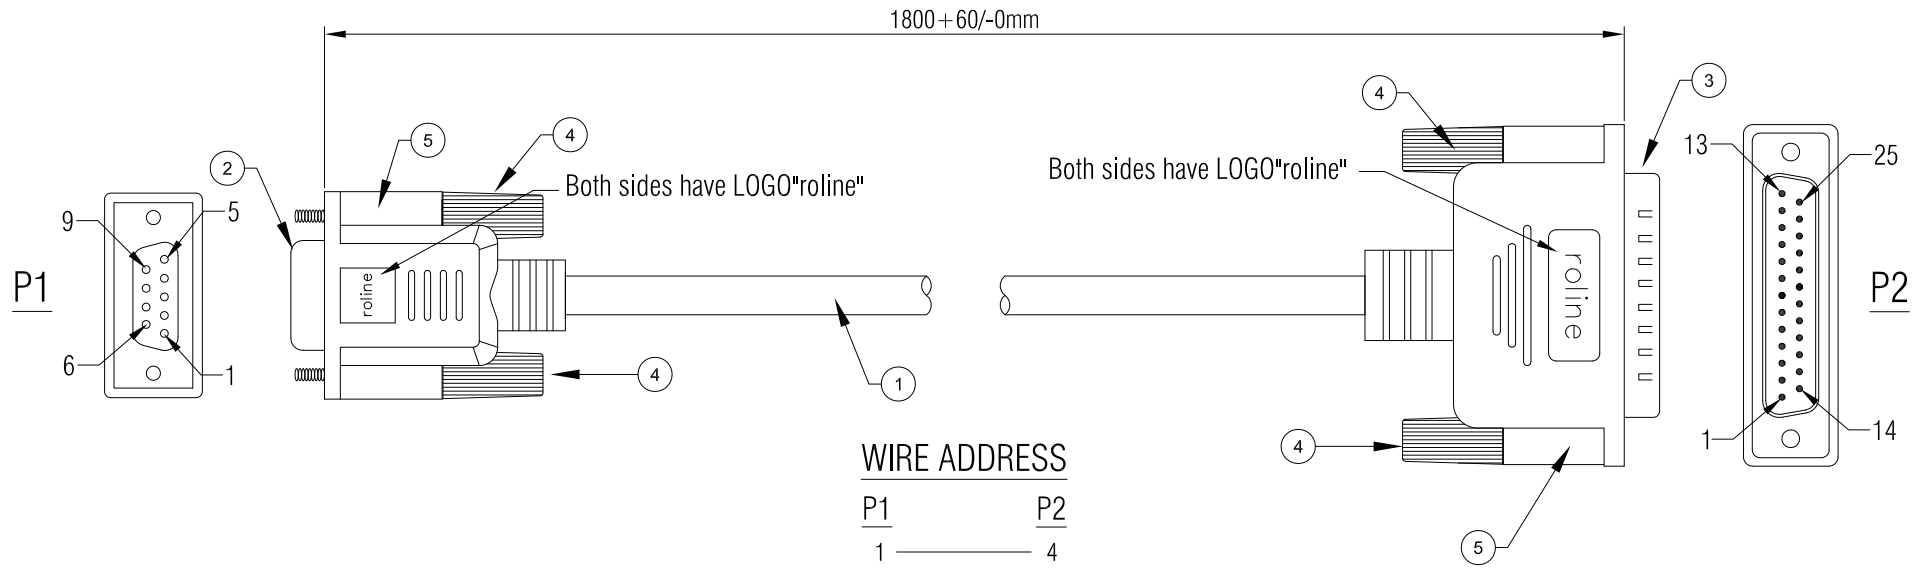

WIRE ADDRESS

<u>P1</u>	<u>P2</u>
1	4
2	2
3	3
4	5+6
5	7
7	8
6+8	20
Shell	Shell

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

5	45P PVC BEIGE		G
4	Screw: #4-40UNC(Nickel Plated,Beige)	4	PCS
3	DB 25P MALE(Black Insulator, Nickel Plated)	1	PCS
2	DB 9P FEMALE(Black Insulator, Nickel Plated)	1	PCS
1	NON-JUL 30AWG*7C+AE,OD=5.0mm BEIGE PVC JACKET.	1	PCS
NUMBER	BOM.NO	PRODUCT SPECIFICATIONS	Quantity Unit

ROLINE Serial Printer Cable,DB9 F - DB25 M, 1.8 m		
Item	11.01.4618	
Draw	Andi	Date: 2015.08.17
Approval		
Duty	F16	BOM.NO:

**SECOMP**