


RoHS Compliant

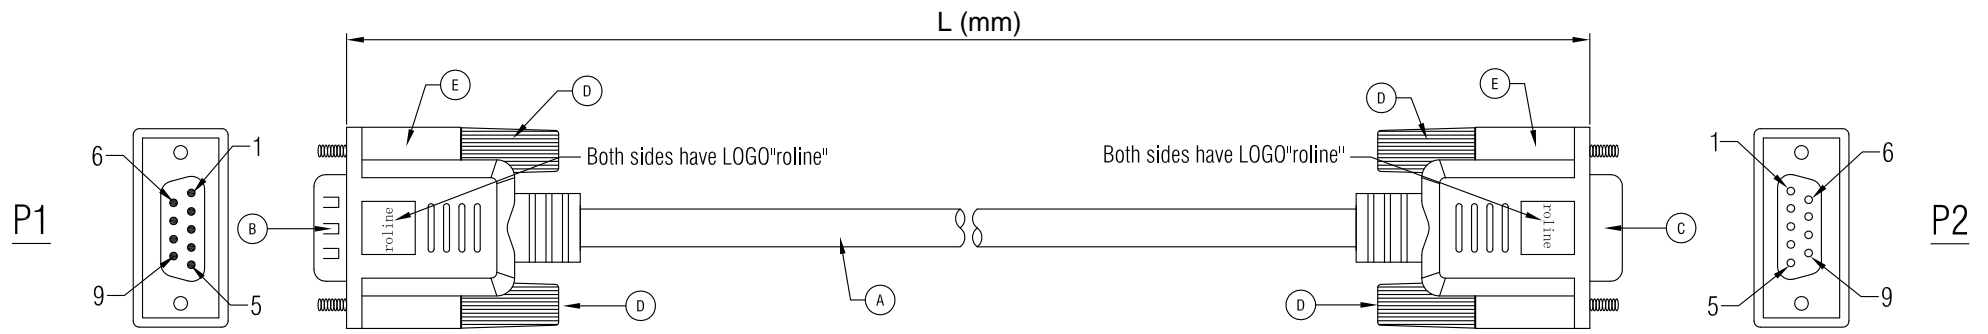

ITEM NO	L(mm)	T(mm)
11.01.6218	1800	+30/-0mm
11.01.6230	3000	+50/-0mm
11.01.6260	6000	+50/-0mm
11.01.6290	10000	+100/-0mm

WIRE ADDRESS

P1	P2
1 — Black	1
2 — Brown	2
3 — Red	3
4 — Orange	4
5 — Yellow	5
6 — Green	6
7 — Blue	7
8 — Purple	8
9 — Gray	9
Shell — Drain	Shell

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:10Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

E	45P PVC BEIGE		G
D	#4-40UNC 2.3*50MM BEIGE MOLD NICKEL PLATED	4	PCS
C	DB 9P FEMALE(Black Insulator,Nickel Plated)	1	PCS
B	DB 9P MALE(Black Insulator,Nickel Plated)	1	PCS
A	NON-UL 30AWG*9C+AE,OD=5.0mm,BEIGE PVC JACKET.	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

D		
C		
B		
VER.A	REVISE	DATE
ROLINE RS-232 Cable DB9 M - F		
Item		
Draw	<i>Kobe</i>	Date: 2015.08.17
Approval		
Duty	F16	BOM.NO:
Sample NO.	2016C42040A	Drawings of 1 (1) Proportion: 1:1 Unit(mm)

**SECOMP**