


WIRE ADDRESS

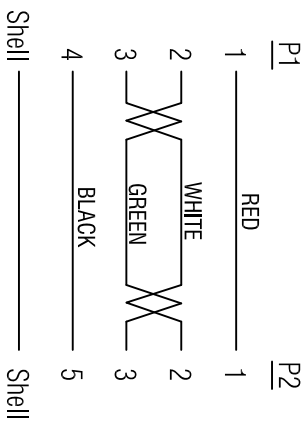

Electrical Test:

1. 100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE:3Ω MAX.
3. INSULATION RESISTANCE:5MΩ MIN.
4. HI-POT:300V DC/10MS.
5. SUPPORT USB 2.0 480Mbps.

D	45P PVC BLACK	6			
C	USB Micro B5P MALE(Black Insulator, Shell Nickel Plated)	PCS			
B	USB A MALE(White Insulator, Shell Nickel Plated)	PCS			
A	UL2725,28AWG*1P+28AWG*2C +ADB,OD:3.5mm,BLACK COLOR PVC JACKET.	PCS			
NUMBER	1	2	4	Quantity	Unit

ROLINE Micro USB BM to USB AM Black L=0.15m

Item 11.02.8310

Draw *Yoko* Date: 2020.05.13

Approval

Duty F16 BOM.NO.:13898

Sample NO.

Drawings of 1 (2) Proportion: 1:1 Unit(mm)