



RoHS Compliant

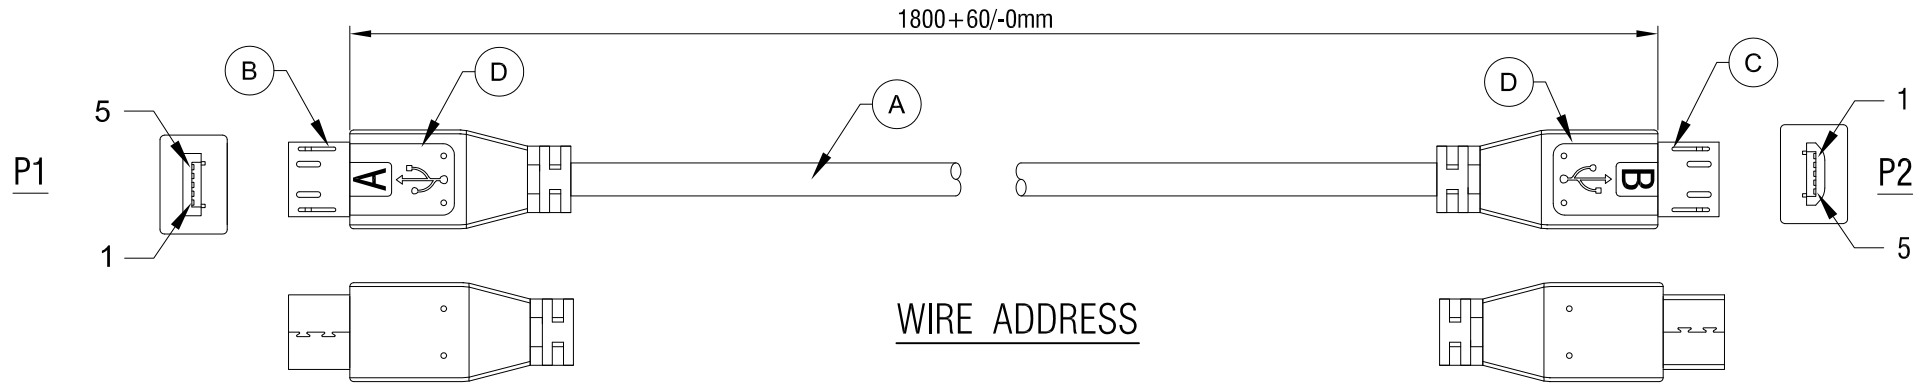

WIRE ADDRESS

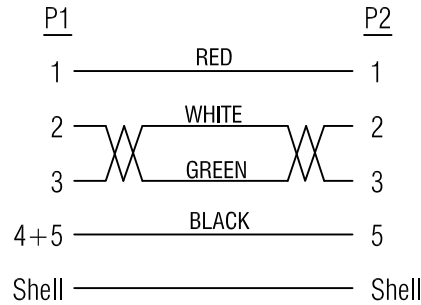

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

D	45P PVC BLACK		G	ROLINE USB 2.0 Cable, Micro A M - Micro USB B M, 1.8m, black	
C	USB 2.0 Micro B5P MALE(BLACK INSULATION, NICKEL PLATED,PIN GOLD PLATED 30U")	1	PCS	Item	11.02.8753
B	USB Micro A5P MALE(BLACK INSULATION,NICKEL PLATED,PIN GOLD PLATED 30U")	1	PCS	Draw	Kobe Date: 2016.01.27
A	UL2725 28AWG*1P+24AWG*2C+AL+B,OD:5.0mm BLACK PVC JACKET	1	PCS	Approval	
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16 BOM.NO:12319

SECOMP