


RoHS Compliant

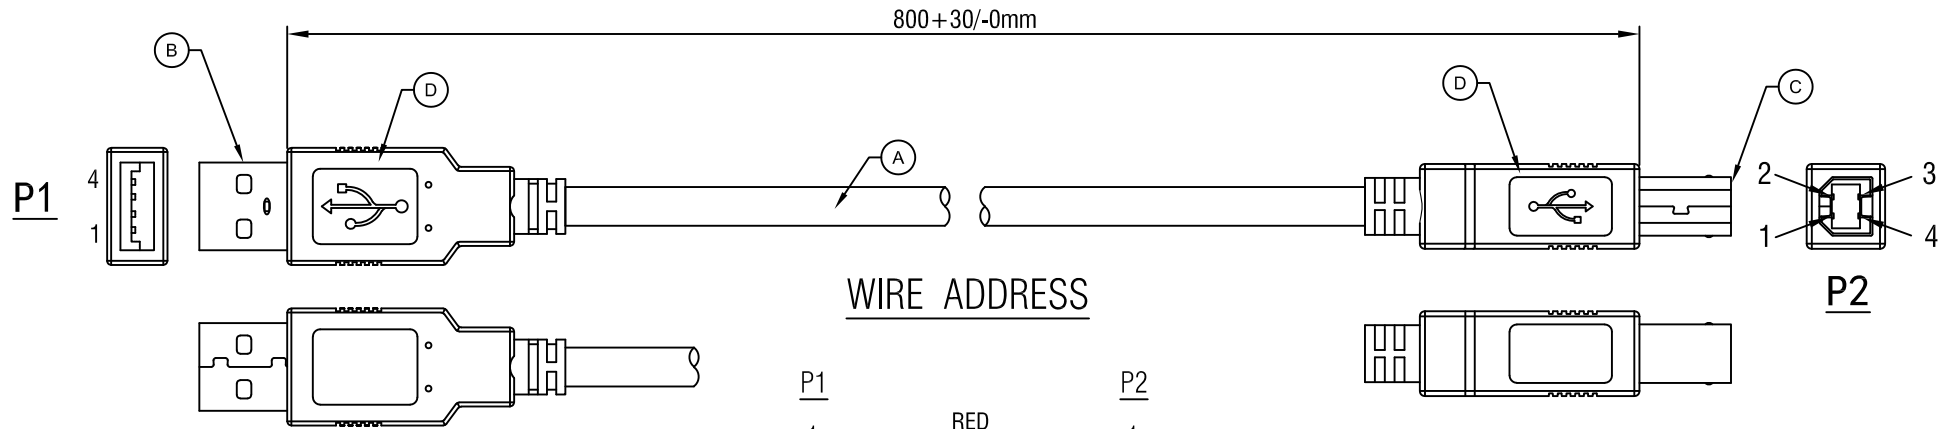

WIRE ADDRESS

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
Shell		Shell

Electrical Test:  
 1.100% TEST OPEN SHORT MIS-WIRE.  
 2.CONTACT RESISTANCE:3Ω MAX.  
 3.INSULATION RESISTANCE:5MΩ MIN.  
 4.HI-POT:300V DC/10MS.

D	45P PVC BLACK		G	ROLINE USB 2.0 Cable, Type A-B, 0.8m		
C	USB 2.0 B MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Item	11.02.8808	
B	USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Draw	Sam	Date: 2014.11.28
A	UL2725 28AWG*1P+24AWG*2C+ AB OD:5.0mm BLACK COLOR PVC JACKET	1	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	BOM.NO: 10129
1	2	4		Sample NO.	Drawings of 1 (2)	Proportion: 1:1 Unit(mm)

