



RoHS Compliant

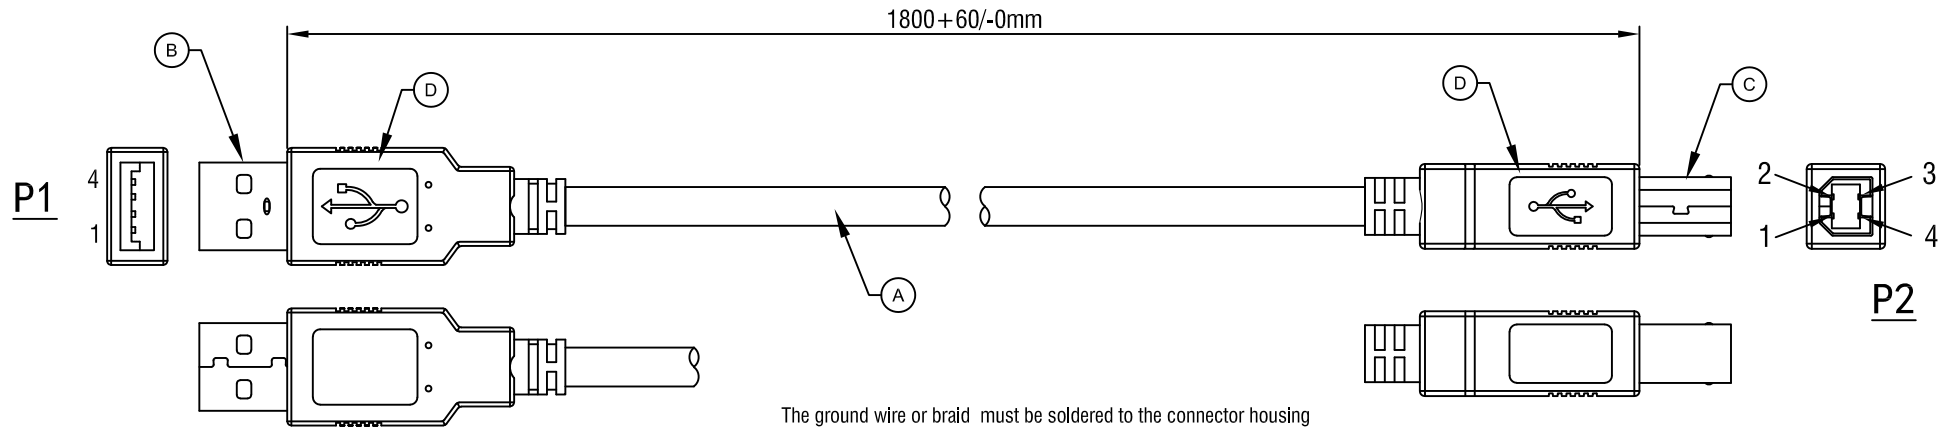

The ground wire or braid must be soldered to the connector housing

### WIRE ADDRESS

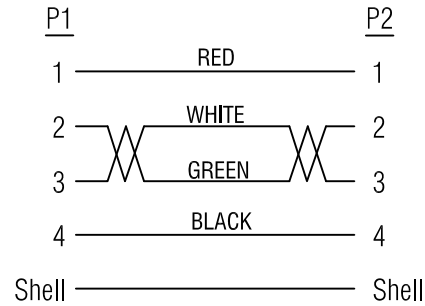

#### Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

D	45P PVC BLACK				G	ROLINE USB 2.0 CABLE, USB AM-BM, BLACL, 1.8M		<b>SECOMP</b>
C	USB 2.0 B MALE(White Insulator,Shell Nickel Plated,Pin Gold Plated 30U")	1			PCS	Item	11.02.8818	
B	USB 2.0 A MALE(White Insulator,Shell Nickel Plated,Pin Gold Plated 30U")	1			PCS	Draw	Sam      Date: 2015.03.26	
A	UL2725 28AWG*1P+24AWG*2C+ADB(BC),OD=5.0mm,BLACK PVC JACKET.	1			PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity			Unit	Duty	F16	
						Sample NO.	Drawings of 1 (2) Proportion: 1:1 Unit(mm)	