


RoHS Compliant

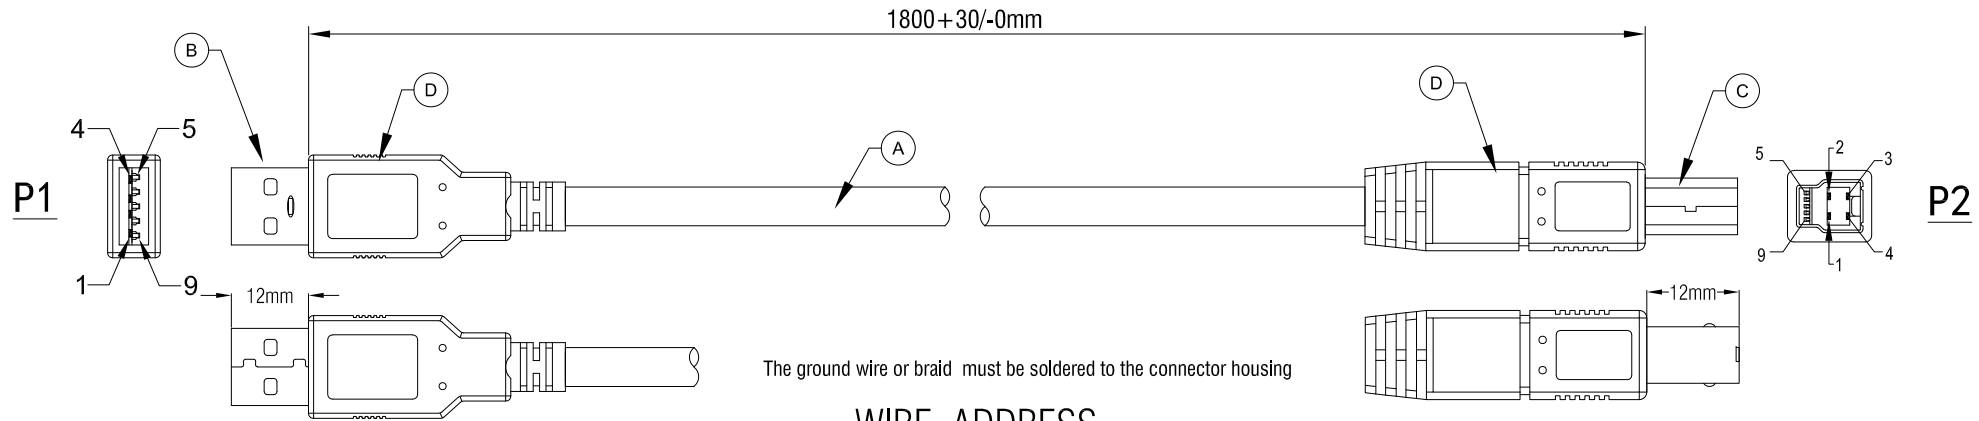

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

P1		P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
5	Yellow	5
6	Blue	6
7	D	7
8	Orange	8
9	Purple	9
Shell	D+B	Shell

- Electrical Test:**
- 100% TEST OPEN SHORT MIS-WIRE.
 - CONTACT RESISTANCE:3Ω MAX.
 - INSULATION RESISTANCE:5MΩ MIN.
 - HI-POT:300V DC/10MS.
 - SUPPORT USB 3.2 GEN1 5Gbps

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Sample NO.	Drawings of 1 (1)	Proportion: 1:1	Unit(mm)	
D	45P PVC BLACK		G	ROLINE USB 3.2 Gen 1 Cable, A - B, M/M, black, 1.8 m				
C	USB B MALE(Blue Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Item	11.02.8870			
B	USB A MALE(Blue Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Draw	Sam	Date: 2014.12.05		
A	UL2725 OR UL20276 (28AWG*1P+ADM)*2C+28AWG*1P+24AWG*2C+ADB,OD=5.5mm, BLACK PVC JACKET.(BC Wire)	1	PCS	Approval				
				Duty	F16	BOM.NO: 13413		

