



RoHS Compliant

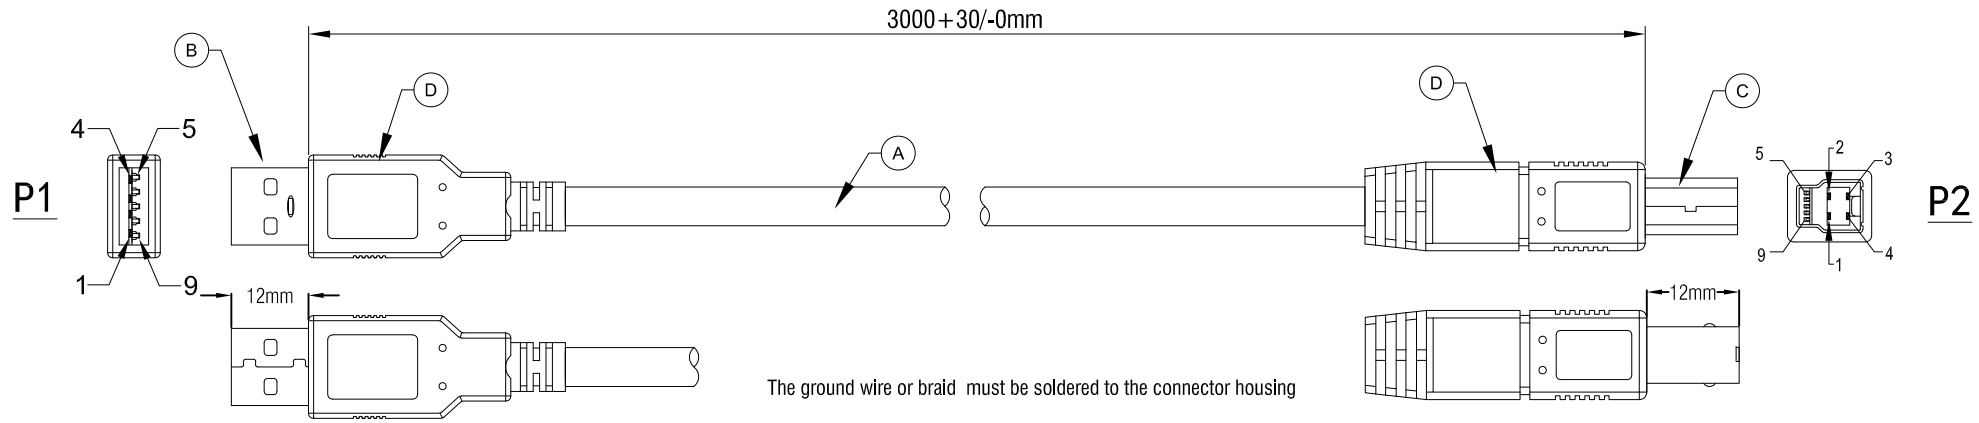

The ground wire or braid must be soldered to the connector housing

### WIRE ADDRESS

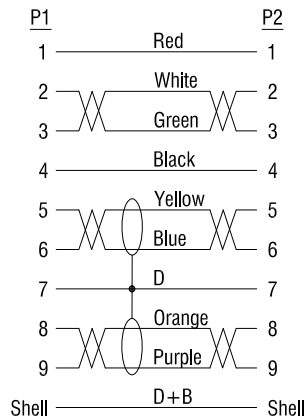

#### Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.
- 5.SUPPORT USB 3.2 GEN1 5Gbps

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Sample NO.	Drawings of 1 (2)	Proportion: 1:1	Unit(mm)	
D	45P PVC BLACK		G	ROLINE USB 3.2 Gen 1 Cable, A - B, M/M, black, 3 m				
C	USB B MALE(Blue Insulator, Nickel Plated,PIN Gold Plated 30")	1	PCS	Item	11.02.8871			
B	USB A MALE(Blue Insulator, Nickel Plated,PIN Gold Plated 30")	1	PCS	Draw	Sam	Date: 2014.12.05		
A	UL2725 OR UL20276 (28AWG*1P+ADM)*2C+28AWG*1P+24AWG*2C+ADB, OD=5.5mm,BLACK PVC JACKET.(BC Wire)	1	PCS	Approval				
				Duty	F16	BOM.NO: 11389		