



RoHS Compliant

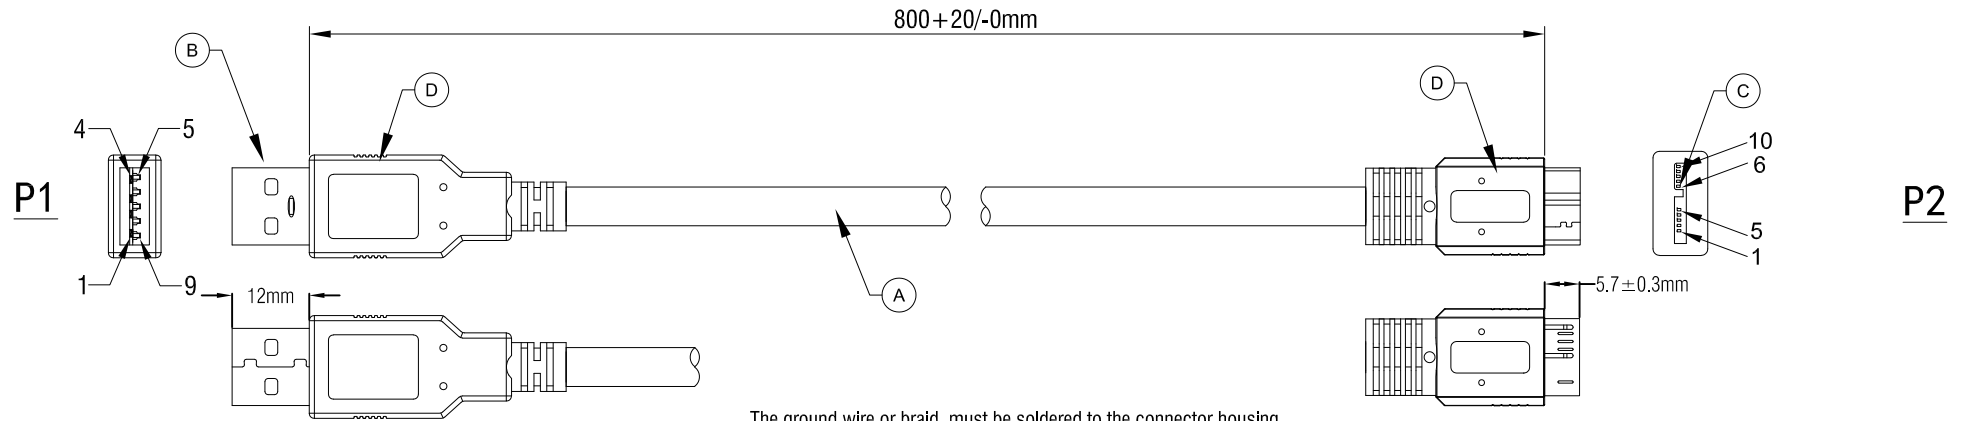

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

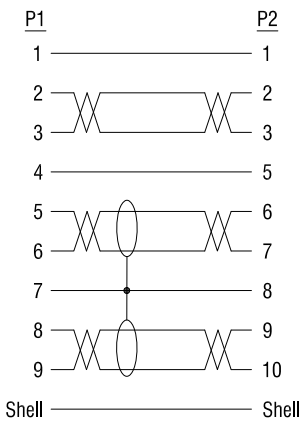

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.SUPPORT USB 3.2 GEN1 5Gbps

D	45P PVC BLACK		G	ROLINE 3.2 Gen 1 Cable, A - Micro A, M/M, black, 0.8 m		
C	USB Micro A MALE(Black Insulator, Shell Nickel Plated,Pin Gold Plated 30U*)	1	PCS	Item	11.02.8872	
B	USB A MALE(Blue Insulator, Blue Insulator, Shell Nickel Plated,Pin Gold Plated 30U*)	1	PCS	Draw	Sam Date: 2014.11.28	
A	UL2725 OR UL20276 (28AWG*1P+ADM)*2C+28AWG*1P+24AWG*2C+ADB,OD=5.5mm, BLACK PVC JACKET.(BC Wire)	1	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16 BOM.NO:13484	
				Sample NO.	Drawings of 1 (1)	Proportion: 1:1 Unit(mm) A4