



RoHS Compliant

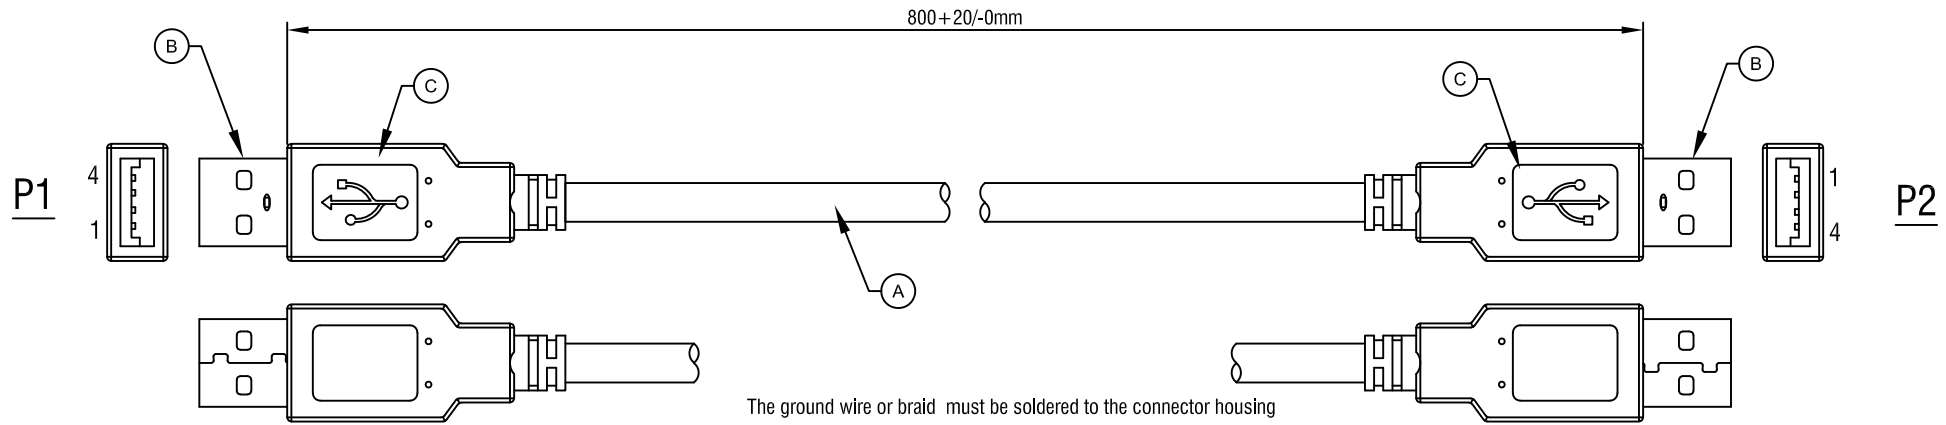

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

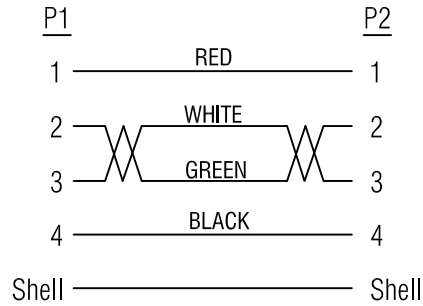

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.
- 5.SUPPORT USB 2.0 480Mbps.

ROLINE USB 2.0 CABLE, USB AM-AM, 30U", 0.8M

C	45P PVC BLACK		G
B	USB A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	2	PCS
A	UL2725 28#(7/0.127/TC)*1P+24#(7/0.20/TC)*2C+AL+D[28#(7/0.12/BC)]+B(AM/64B),OD=5.0mm BLACK PVC JACKET.(VW-1)	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

Item	11.02.8908	
Draw	Andi	Date: 2014.05.22
Approval		
Duty	F16	

SECOMP