


RoHS Compliant

3000 + 60/-0mm

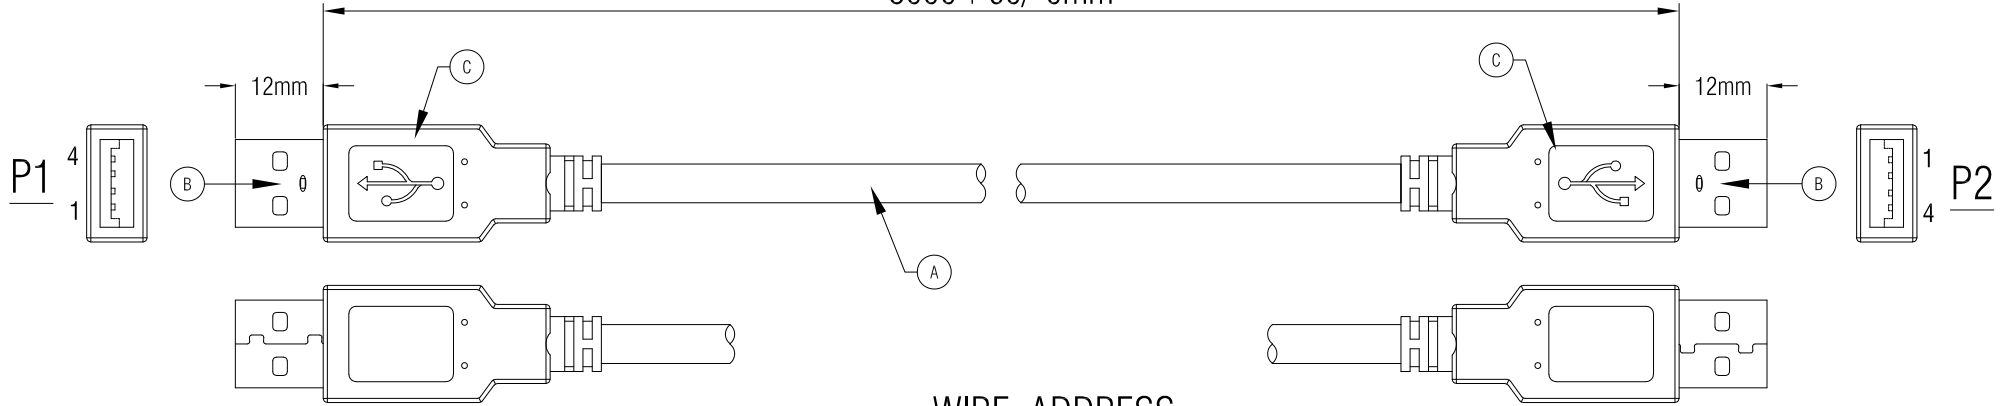

WIRE ADDRESS

P1		P2	
1	Red	1	
2	White	2	
3	Green	3	
4	Black	4	
Shell		Shell	

**Electrical Test:**

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.
- 5.SUPPORT USB 2.0 480Mbps.

ROLINE USB 2.0 Cable,A-A,M-M ,black,3m			<b>SECOMP</b>
Item	11.02.8930		
Draw	Sam	Date: 2014.11.18	
Approval			
Duty	F16	BOM.NO:10134	

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
C	45P PVC BLACK		G
B	USB A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	2	PCS
A	UL2725 28AWG*1P+24AWG*2C+AB(AM),OD=5.0mm,BLACK PVC JACKET.(BC Wire)	1	PCS