



RoHS Compliant

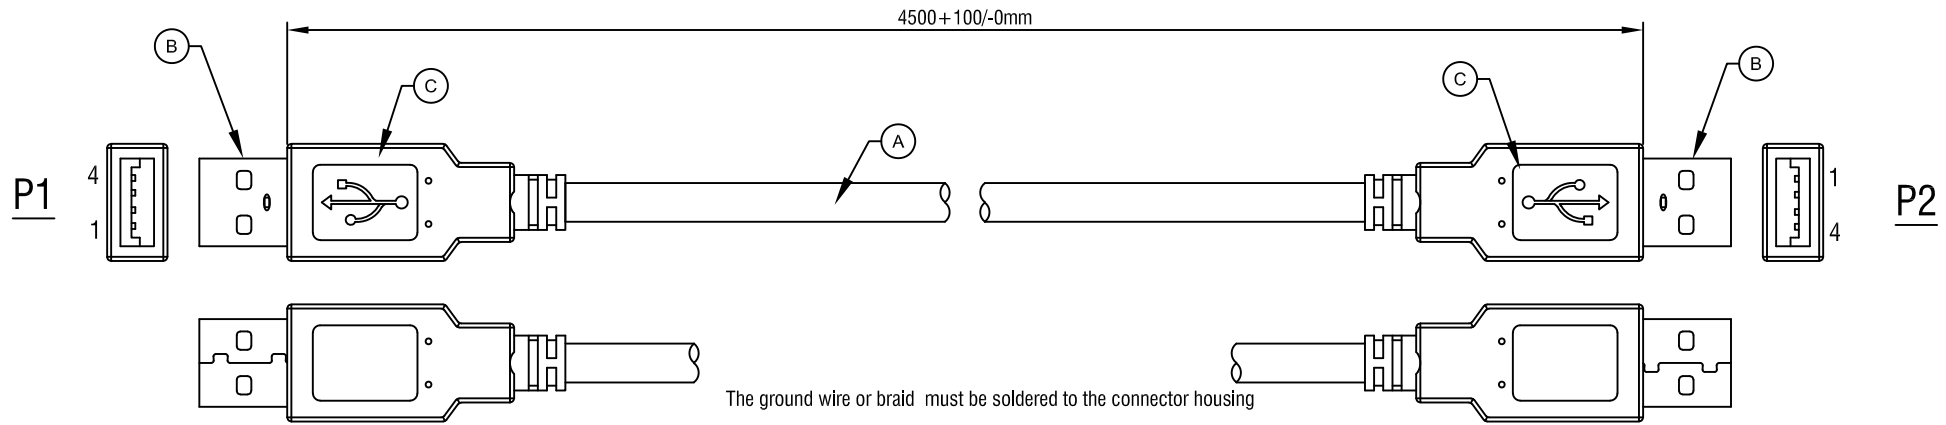

The ground wire or braid must be soldered to the connector housing

**WIRE ADDRESS**

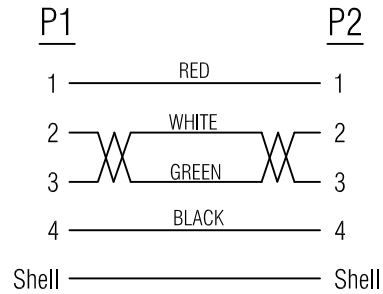

- Electrical Test:  
 1.100% TEST OPEN SHORT MIS-WIRE.  
 2.CONTACT RESISTANCE:5Ω MAX.  
 3.INSULATION RESISTANCE:5MΩ MIN.  
 4.HI-POT:300V DC/10MS.  
 5.SUPPORT USB 2.0 480Mbps.

ROLINE USB 2.0 CABLE, USB AM-AM, 30U", 4.5M		<b>SECOMP</b>	
Item	11.02.8945		
Draw	Sam		Date: 2014.12.05
Approval			
Duty	F16		BOM.NO: 10929
Sample NO.	Drawings of 1 (2) Proportion: 1:1 Unit(mm)		

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
C	45P PVC BLACK		G
B	USB A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	2	PCS
A	UL2725 28#(7/0.127/TC)*1P+24#(7/0.20/TC)*2C+AL+D[28#(7/0.12/BC)]+B(AM/64B),OD=5.0mm,BLACK PVC JACKET.	1	PCS