



RoHS Compliant

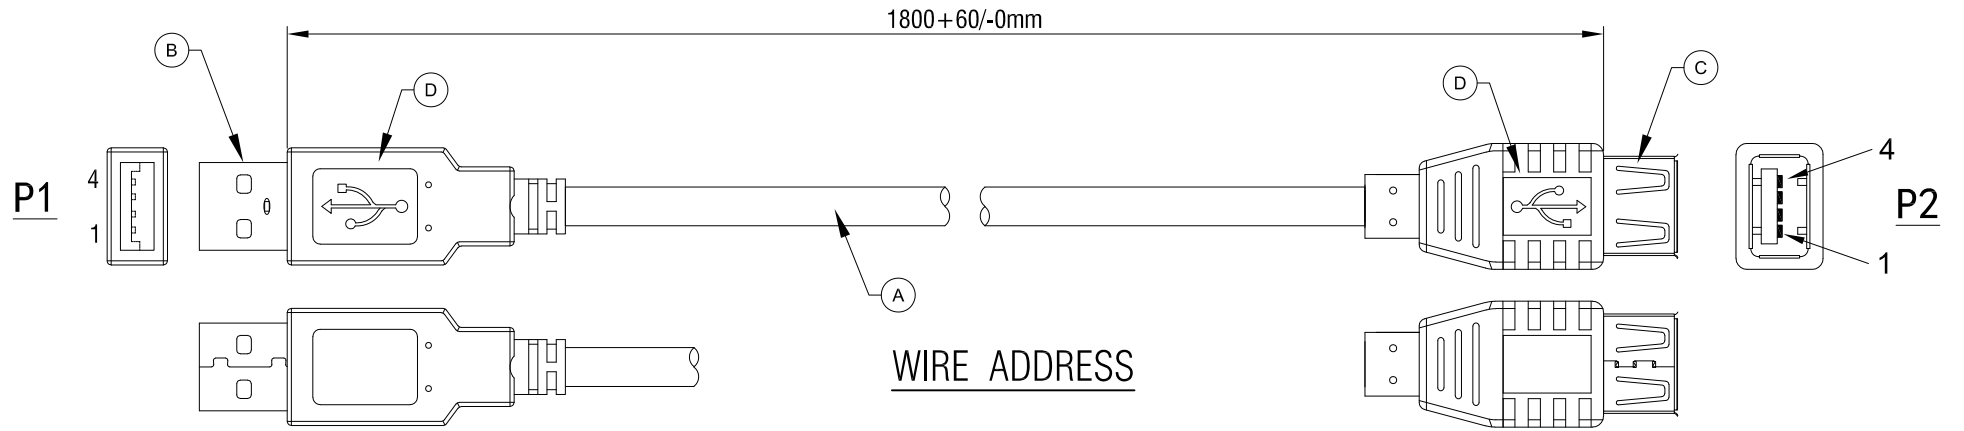

WIRE ADDRESS

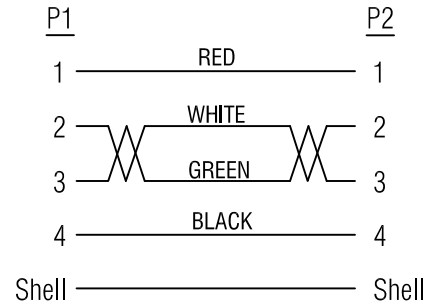

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

D		45P PVC BLACK		G	ROLINE USB 2.0 Cable, A - A, M/F, black, 1.8 m			SECOMP
C		USB 2.0 A FEMALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Item	11.02.8948		
B		USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Draw	Sam	Date: 2014-11-28	
A		UL2725 28AWG*1P+24AWG*2C+AB,OD=5.0mm,BLACK PVC JACKET.(BC Wire)	1	PCS	Approval			
NUMBER	BOM.NO	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	BOM.NO: 10246	
1	2	4			Sample NO.	Drawings of 1 (2) Proportion: 1:1 Unit(mm)		A4