RoHS Compliant

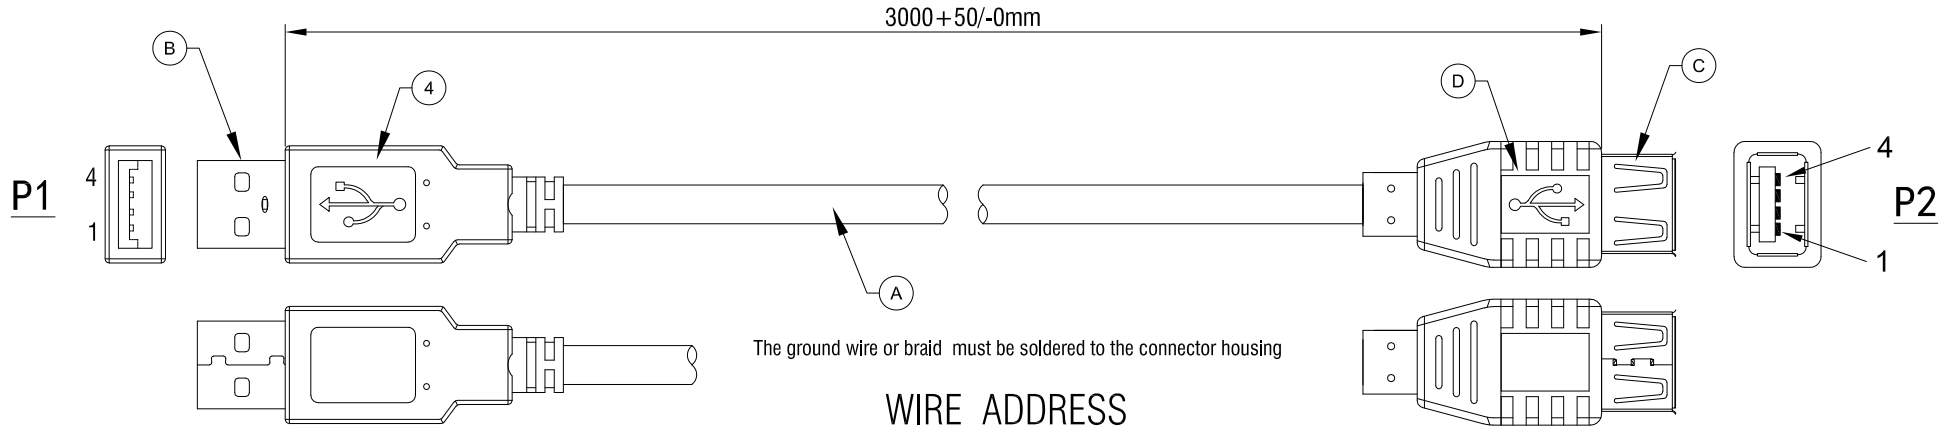

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

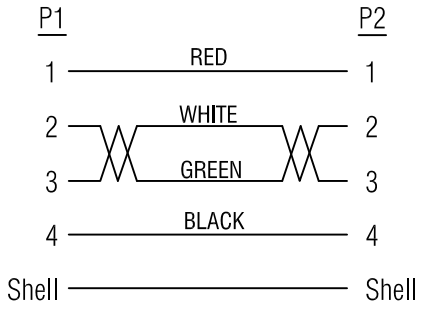

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
D	45P PVC BLACK		G
C	USB 2.0 A FEMALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS
B	USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS
A	UL2725 28AWG*1P+24AWG*2C+ADB,OD=5.0mm,BLACK PVC JACKET.(BC Wire)	1	PCS

ROLINE USB 2.0 CABLE, USB AM-AF, 15U", 3M

Item	11.02.8960	
Draw	Sam	Date: 2014.11.28
Approval		
Duty	F16	

SECOMP

Sample NO. | Drawings of 1 (2) | Proportion: 1:1 | Unit(mm) | A4