



RoHS Compliant

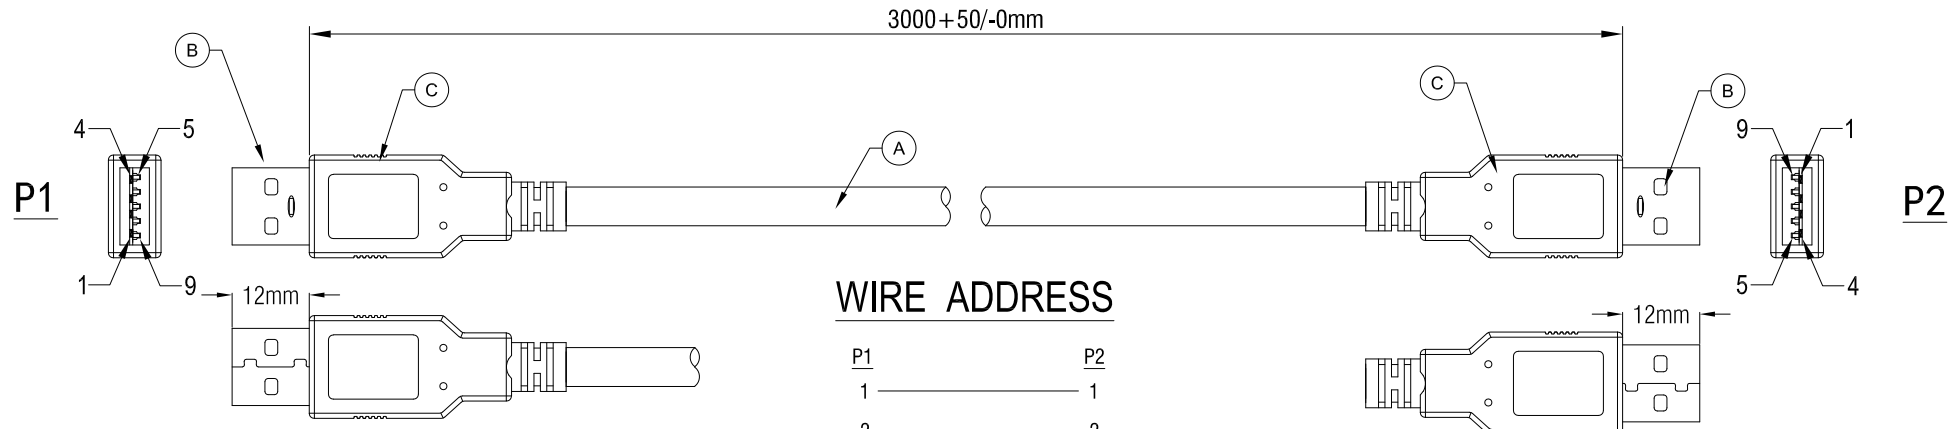

WIRE ADDRESS

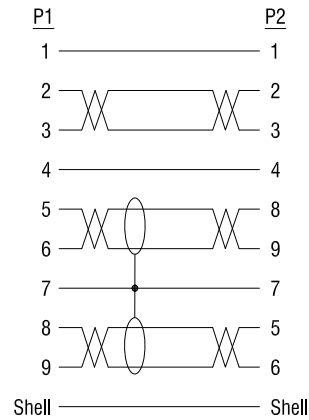

Electrical Test:

1. 100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 5MΩ MIN.
4. HI-POT: 300V DC/10MS.

C	45P PVC BLACK		G
B	USB 3.0 A MALE(Blue Insulator, Shell Nickel Plated, Pin Gold Plated 30U")	2	PCS
A	UL2725 OR UL20276 (28AWG*1P+EAM)*2C+28AWG*1P+24AWG*2C+AEB, OD=5.5mm, BLACK PVC JACKET.(BC Wire)	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

ROLINE USB 3.2 Gen 1 Cable, A - A, M/M, black, 3 m		
Item	11.02.8971	
Draw	Sam	Date: 2014.10.06
Approval		
Duty	F16	BOM.NO: 13414

