



10000+100/-0mm

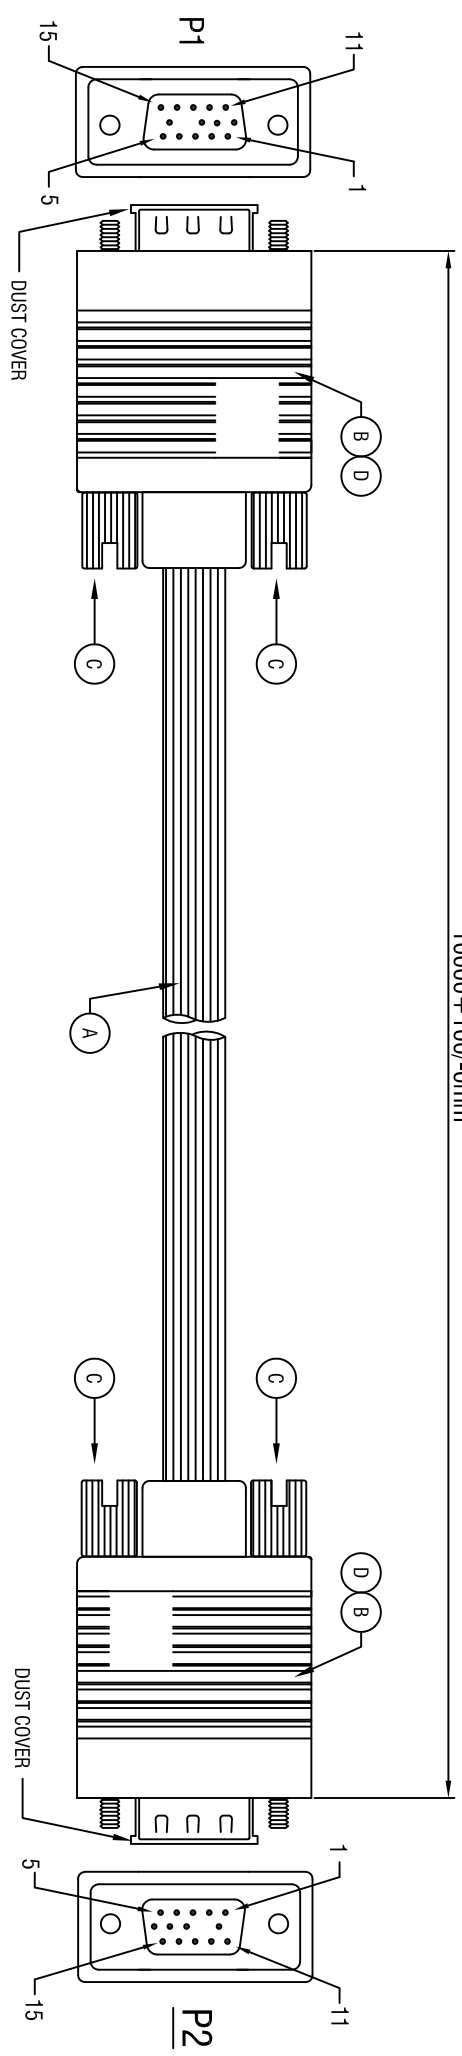

WIRE ADDRESS

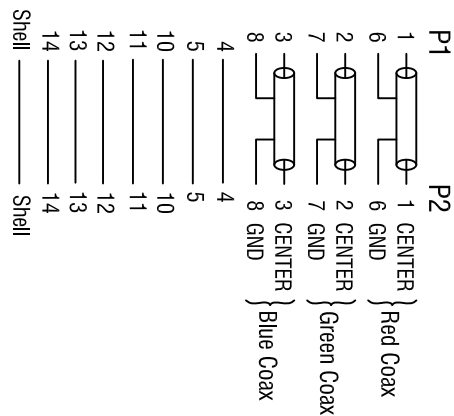

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

D	4SP BLACK PVC	G	ROLINE HQ VGA Cable, HD15 M - HD15 M, 10m	
C	HD37.7 Screw	4	Item	11.04.5210
B	HDB15P MALE(PIN9 OUT,Black Insulator Nickel Plated)	2	Draw	<i>Make</i> Date: 2020.05.13
A	UL2919,28# 300AX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1	Approval	
F	NUMBER	Quantity	Duty	F16
	PRODUCT SPECIFICATIONS	Unit	BOM.NO.:	13903
	1		Sample NO.	
	2		Drawings of 1 (2)	Proportion: 1:1
	4		Unit(mm)	A4

