



15000+150/-0mm

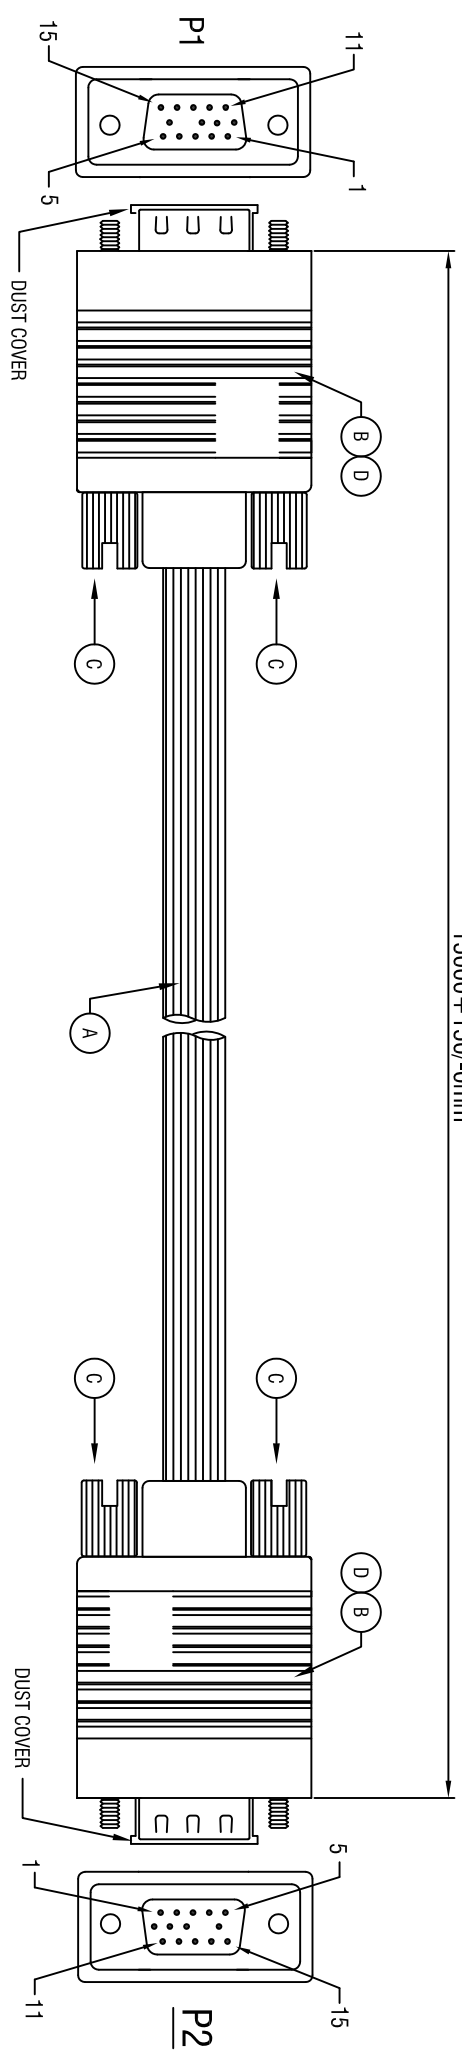

WIRE ADDRESS

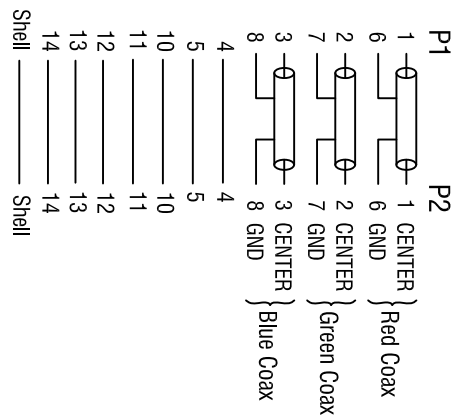

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

D	4SP BLACK PVC	G
C	HD37.7 Screw	4 PCS
B	HDB15P MALE(PIN9 OUT,Black Insulator,Nickel Plated)	2 PCS
A	UL2919,28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1 PCS
PRODUCT SPECIFICATIONS		
NUMBER	1	2
Quantity Unit		

ROLINE HQ VGA Cable, HD15 M - HD15 M, 15m		
Item	11.04.5215	
Draw	<i>Make</i>	Date: 2020.05.13
Approval		
Duty	F16	BOM.NO.:13904
Sample NO.		
Drawings of 1 (2) Proportion: 1:1 Unit(mm) A4		

