



20000+200-0mm

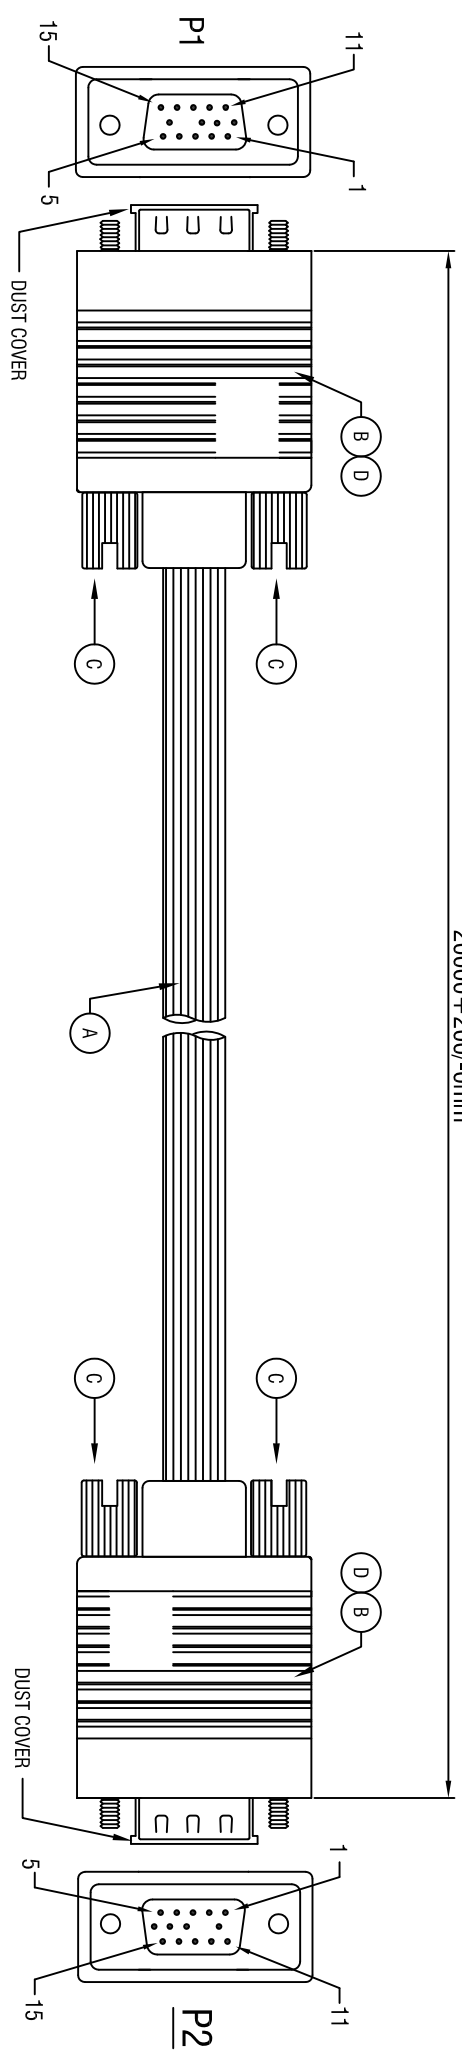

**WIRE ADDRESS**

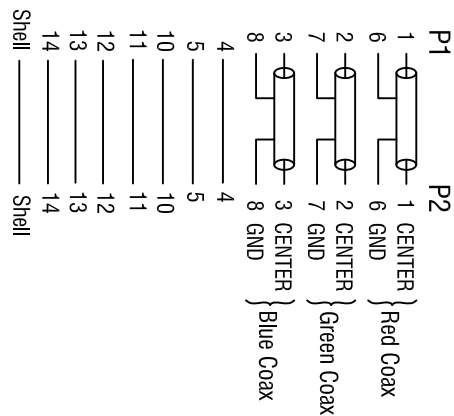

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
  - 2.CONTACT RESISTANCE:3Ω MAX.
  - 3.INSULATION RESISTANCE:5MΩ MIN.
  - 4.HI-POT:300V DC/10MS.
  - 5.Real Test Passed 1280\*1024.
  - 6.Real Test Not Twinkling,Double Vision and Decolor.

D	4SP BLACK PVC	G	ROLINE HQ VGA Cable, HD15 M - HD15 M, 20m	
C	HD37.7 Screw	4	Item	11.04.5220
B	HDB15P MALE (PIN9 OUT,Black Insulator Nickel Plated)	2	Draw	<i>Make</i> Date: 2020.05.13
A	UI.2919.28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1	Approval	
NUMBER		Quantity	Duty	F16 BOM.NO.:13905
PRODUCT SPECIFICATIONS		Unit	Sample NO.	Drawings of 1 (2) Proportion: 1:1 Unit(mm)  A4

