



3000±50/-0mm

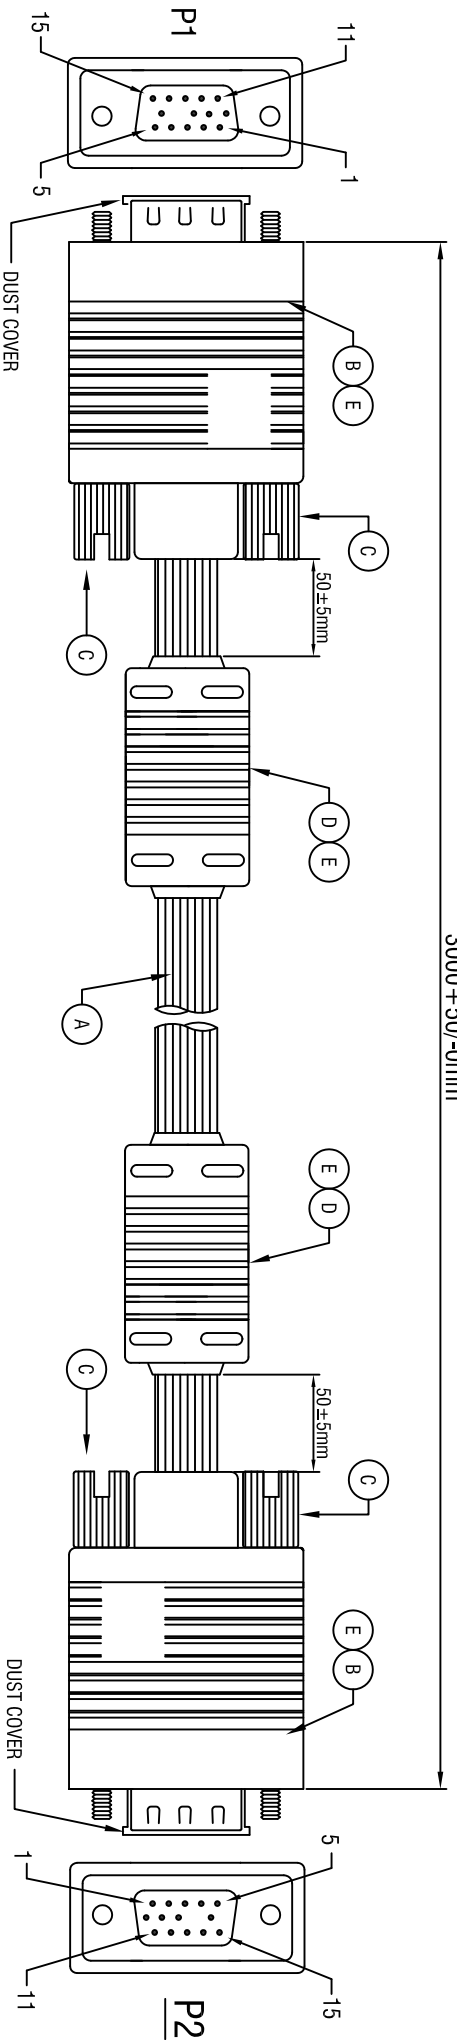

WIRE ADDRESS

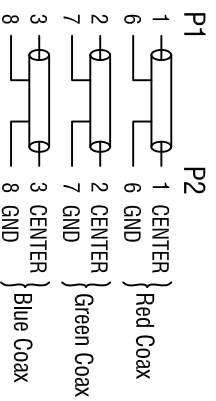

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:5Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling, Double Vision and Decolor.

E	45P BLACK PVC	G
D	Ferrite Core (17.5*28.5*9.5mm)	PCS
C	HD37.7 Screw	PCS
B	HDB15P MALE(PIN9 OUT,Black Insulator,Nickel Plated)	PCS
A	UL2919;28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	PCS
F	NUMBER	BOM:NO
	PRODUCT SPECIFICATIONS	Quantity Unit

ROLINE VGA Cable with Ferrite, HD15 M - HD15 M, 3.0m	
Item	11.04.5253
Draw	<i>Make</i> Date: 2020.05.13
Approval	
Duty	F16 BOM.NO:13908
Sample NO.	

