



10000+100/-0mm

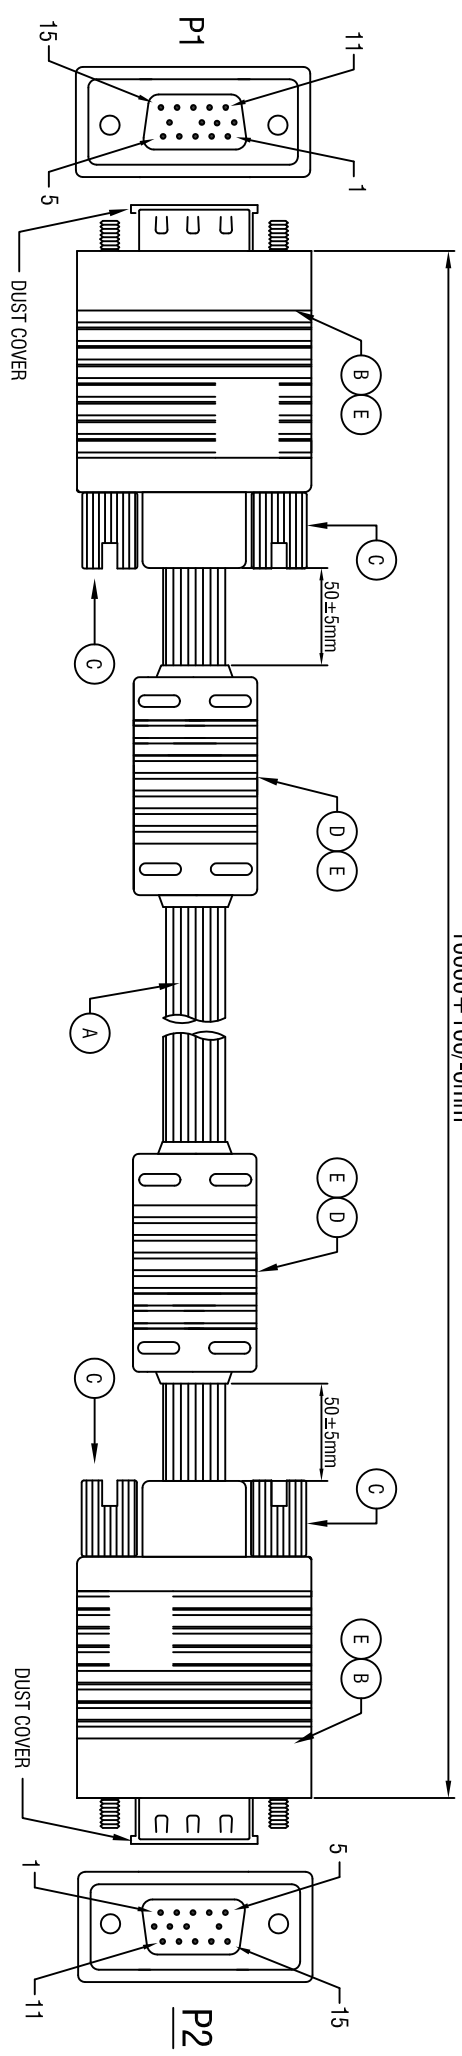

**WIRE ADDRESS**

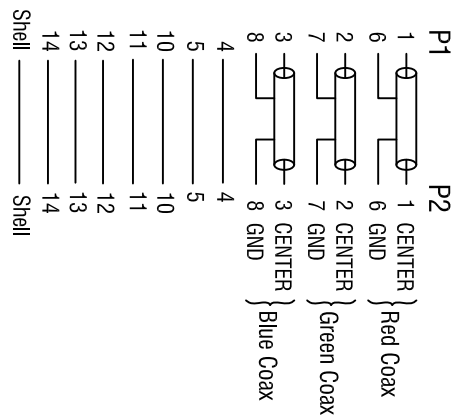

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
  - 2.CONTACT RESISTANCE:5Ω MAX.
  - 3.INSULATION RESISTANCE:5MΩ MIN.
  - 4.HI-POT:300V DC/10MS.
  - 5.Real Test Passed 1280\*1024.
  - 6.Real Test Not Twinkling, Double Vision and Decolor.

E	4SP BLACK PVC	ROLINE VGA Cable with Ferrite, HD15 M - HD15 M, 10m
D	Ferrite Core (17.5*28.5*9.5mm)	Item 11.04.5260
C	HD37.7 Screw	Draw <i>Make</i> Date: 2020.05.13
B	HDB15P MALE (PIN9 OUT, Black Insulator Nickel Plated)	Approval
A	UI2919,28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	Duty F16 BOM.NO:13910
NUMBER	PRODUCT SPECIFICATIONS	Sample NO. Drawings of 1 (2) Proportion: 1:1 Unit(mm) A4

