



15000+150/-0mm

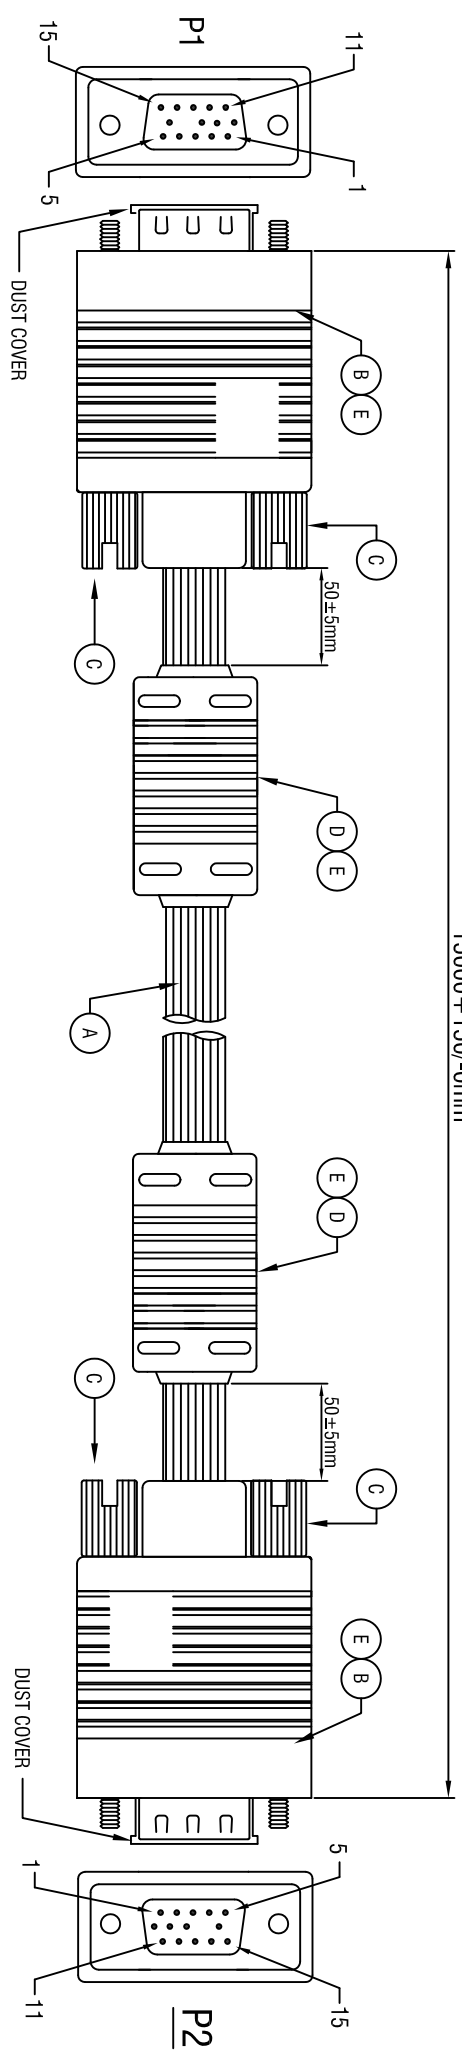

WIRE ADDRESS

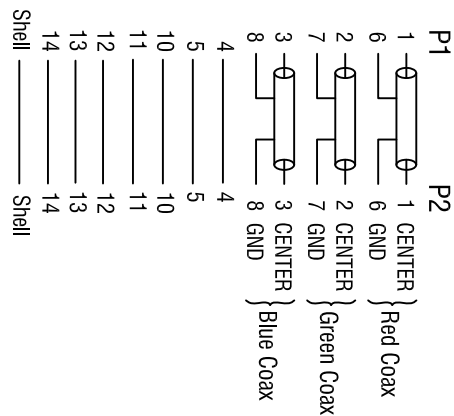

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:5Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling, Double Vision and Decolor.

E	45P BLACK PVC	G	ROLINE VGA Cable with Ferrite, HD15 M - HD15 M, 15m	
D	Ferrite Core (17.5*28.5*9.5mm)	2	Item	11.04.5265
C	HD37.7 Screw	4	Draw	<i>Make</i> Date: 2020.05.13
B	HDB15P MALE(PIN9 OUT, Black Insulator, Nickel Plated)	2	Approval	
A	UL2919,28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1	Duty	F16 BOM.NO:13911
NUMBER		Quantity	Unit	Sample NO.
1		2	4	Drawings of 1 (2) Proportion: 1:1 Unit(mm) A4

