



20000+200-0mm

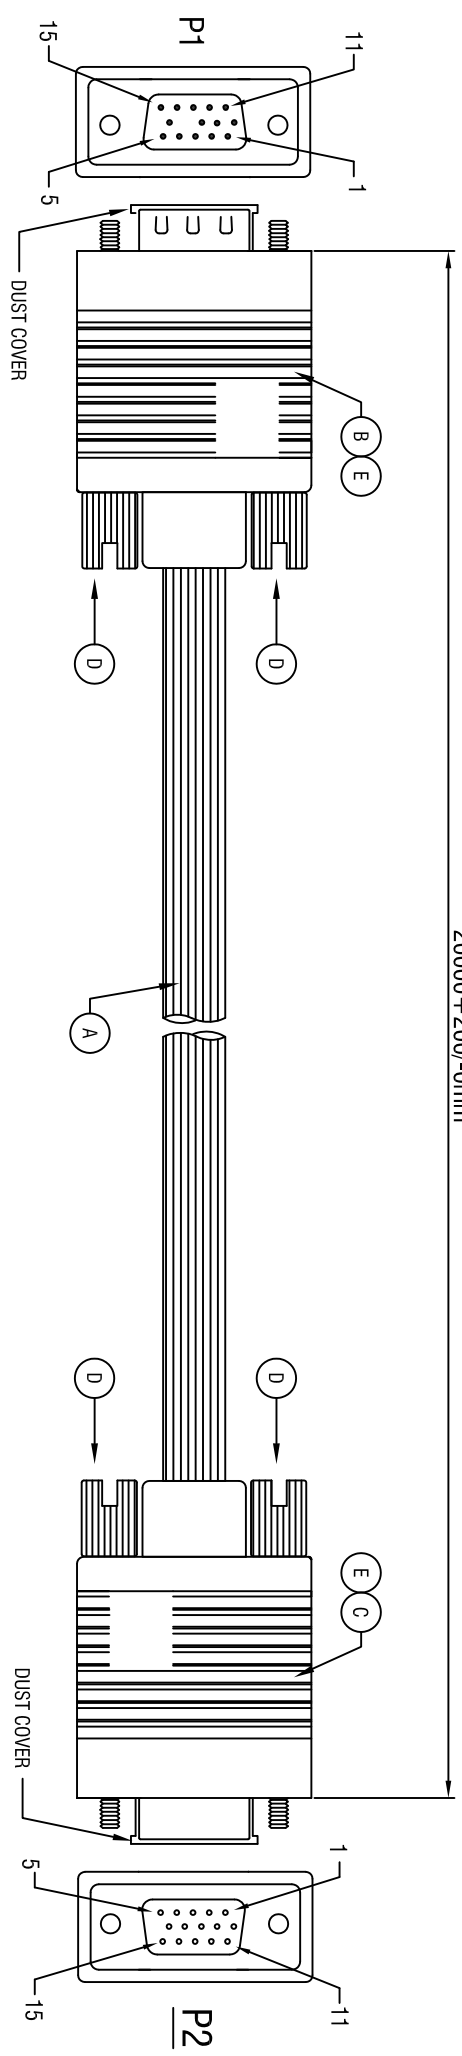

**WIRE ADDRESS**

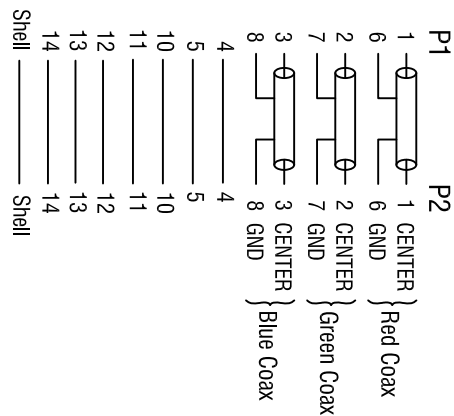

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
  - 2.CONTACT RESISTANCE:20Ω MAX.
  - 3.INSULATION RESISTANCE:5MΩ MIN.
  - 4.HI-POT:300V DC/10MS.
  - 5.Real Test Passed 1280\*1024.
  - 6.Real Test Not Twinkling,Double Vision and Decolor.

E	45P BLACK PVC	ROLINE HQ VGA Cable, HD15 M - HD15 F, 20m
D	HD37.7 Screw	Item 11.04.5320
C	HDB15P FEMALE (PIN9 OUT, Black Insulator Nickel Plated)	Draw <i>Make</i> Date: 2020.05.13
B	HDB15P MALE (PIN9 OUT, Black Insulator Nickel Plated)	Approval
A	UL2919,28# 3GOAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	Duty F16 BOM.NO:
NUMBER	PRODUCT SPECIFICATIONS	Sample NO. Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4

