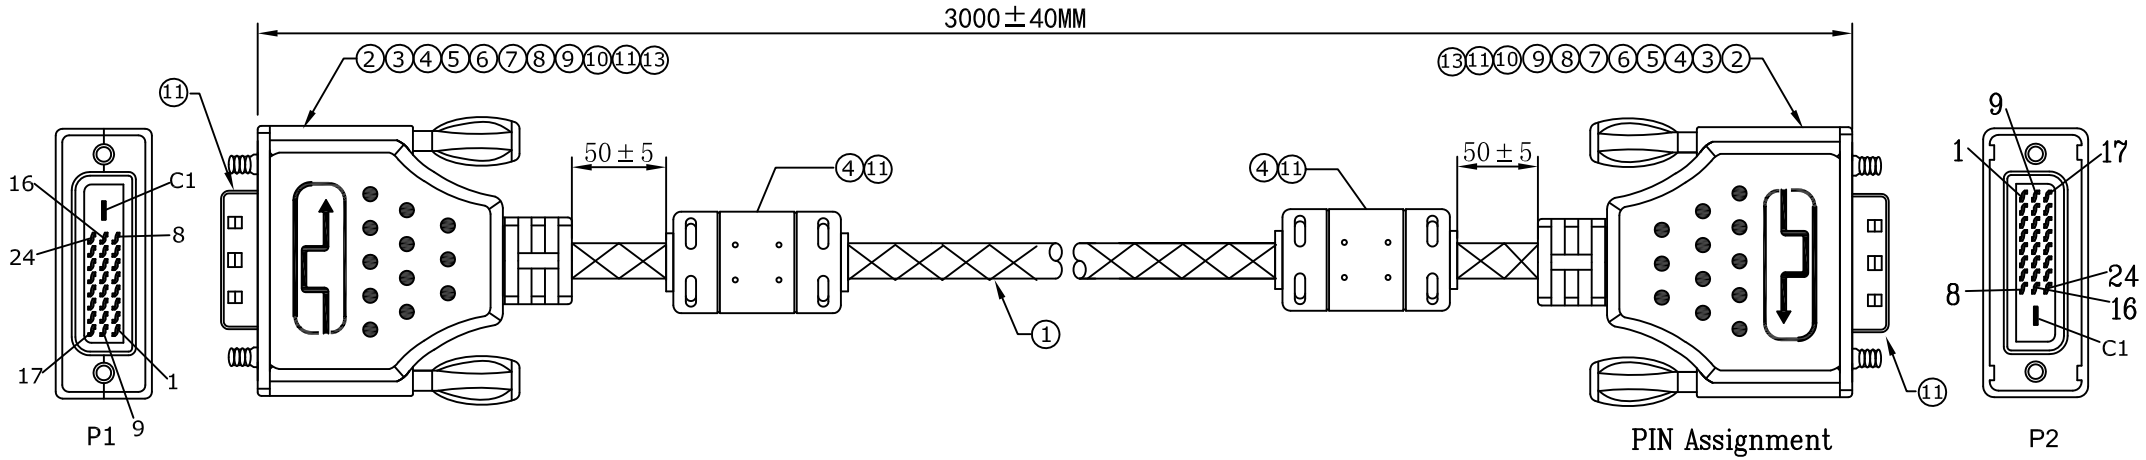

ELECTRICAL TEST:

1.100% OPEN SHORT & MIS WIRE TEST
2.CONTACT RESISTANCE:2 OHM(MAX)
3.INSULATION RESISTANCE:10M OHM(MIN)
4.HI-POT TEST:DC 300V/10ms

PIN Assignment

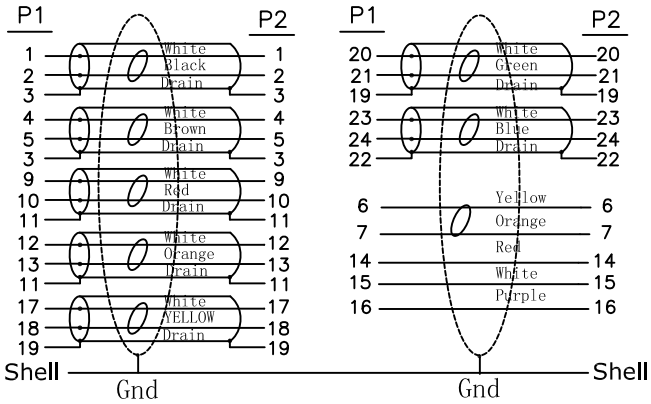

NO.	DESCRIPTION	Q'TY	UNIT
13	W:22mm Copper	0.24	M
12	Magnetic Ring 28.5*17.5*9.5MM	2	pcs
11	DVI M TRANSPARENT DUST COVER	2	pcs
10	DVI 24# ~AL Shell 2~ DVI LOGO	2	pcs
9	DVI 24# ~AL Shell 1~ DVI LOGO	2	pcs
8	#4-40UNC 4*38.5 Gold-plated screws	4	pcs
7	TUBE BLACK : ∮1.5*22mm THICK	0.044	m
6	TUBE BLACK : ∮1.0*12mm THIN	0.168	m
5	BLACK Ø2.0*10mmTHIN	0.14	m
4	45P Black PVC	40	g
3	TRANSPARENT PE	6	g
2	DVI(24+1) M SOLDER TYPE,GOLD PLATED,BLACK INSULATION	2	pcs
1	UL20276 (30AWG*1PR+EAM)*7C+30AWG*1PR+30AWG*3C+AEB 85%AL OD:7.3MM Black	3	M

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

SECOMP

TITLE:
ROLINE GOLD Monitor Cable,DVI M-DVI M ,(24+1) dual link,3M

DRAWN BY		P/N:	11.04.5513
CHECK BY		SCALE NONE	DRAWING NO: CA1790156
		UNIT MM	REV A1
APPD BY		DATE 2013.03.18	1/1