


WIRE ADDRESS



- Electrical Test:
1. 100% TEST OPEN SHORT MIS-WIRE.
 2. CONTACT RESISTANCE:3Ω MAX.
 3. INSULATION RESISTANCE:5MΩ MIN.
 4. HI-POT:300V DC/10MS.
 5. Real Test Passed 3840*2160P 60Hz.
 6. Real Test Not Twinkling, Double Vision and Decolor.

E	45P PVC BLACK		G
D	DP 20P MALE SHELL(BLACK ABS)	1	PCS
C	Mini DP 20P MALE(White Insulator, Nickel Plated)	1	PCS
B	DP 20P MALE(Black Insulator, Nickel Plated)	1	PCS
A	UL20276 (32AWG*1P + D + AL/MLY)*5PCS + 32AWG*5C + AEB(AM BRAID), OD:6.0mm BLACK PVC JACKET	1	PCS
NUMBER	1	PRODUCT SPECIFICATIONS	Quantity Unit
ROLINE DisplayPort Cable, DP M - Mini DP M, 5m		Item 11.04.5637	Date: 2014.09.12
Approval		Duty F16	BOM.NO.:10378
Sample NO.		Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4	

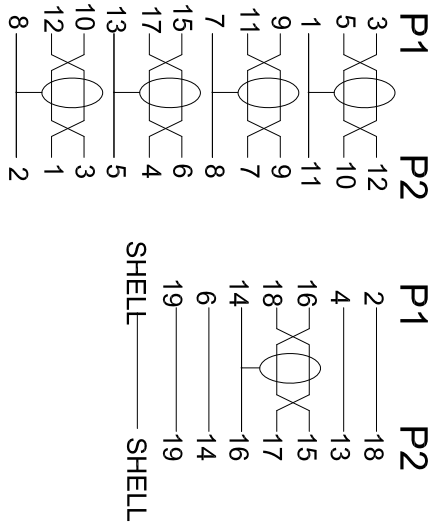