



Datenblatt - Fiche technique - Data sheet

11.04.5641



ROLINE DisplayPort Kabel, Mini DP ST - Mini DP ST, 3,0m

ROLINE Câble DisplayPort Mini DP M - Mini DP M, 3,0m

ROLINE DisplayPort Cable, Mini DP - Mini DP, M/M, 3 m

ROHS-COMPLIANT

| LTR | REV. | DESCRIPTION | DATE |
|-----|------|---|-----------|
| Δ2 | B | ECR # 110829-6 EDIT: CABLE SPEC, TITLE | 08/29/11' |


MINI DISPLAYPORT MALE

LFT

MINI DISPLAYPORT MALE


INS:WHITE

INS:WHITE

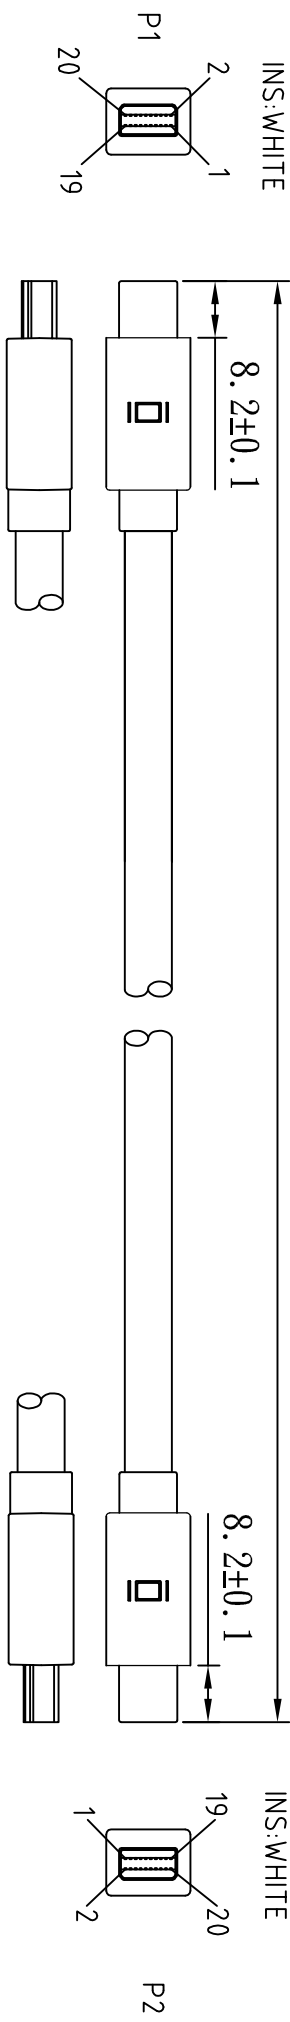

NOTE:

- 1.CABLE:UL20276 [32(7/0.08T.C)×1P INS:FOAM-SKIN-PE+D.W(7/0.08T.C)
+Free-edge-al-foil/Mylar]×5C+#32(7/0.08T.C)×5C INS: PP+AL/MY
+B.D(85%)PVC JACKET; OD:5.5±0.2mm COLOR:BLACK(NK-K01).
- 2.CONNECTOR:
P1 & P2:MINI DISPLAYPORT 20P MALE CONTACT:15U",SHELL:NI-PLATED.
- 3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR
SHELL& CABLE BRAID
- 4.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01).
- 5.ELECTRICAL TEST:
<1>100% OPEN SHORT & MIS WIRE TEST.
<2>CONTACT RESISTANCE 3 Ohms MAX.
<3>INSULATION RESISTANCE 10M Ohms MIN.
- 6.PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

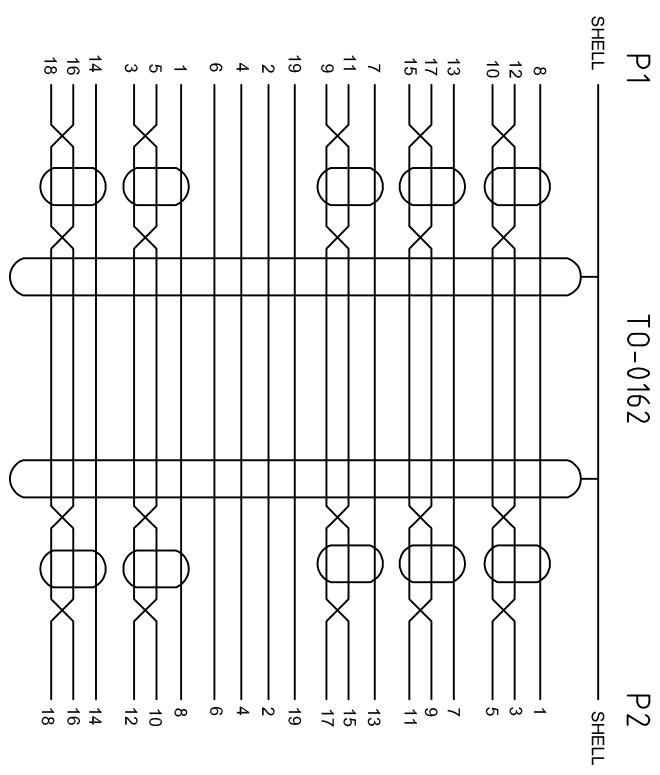

| | | | | | |
|------------|---------------|--------|--------|------------------|------------|
| 200-1448-3 | 11.04.5642-10 | 5000 | 50 | 10 | 20 |
| 200-1448-2 | 11.04.5641-20 | 3000 | 30 | 20 | 40 |
| 200-1448-1 | 11.04.5640-20 | 2000 | 30 | 20 | 40 |
| DWG | P/N | L (mm) | T (mm) | PCS/INNER CARTON | PCS/CARTON |

| | |
|---|------------------|
| Tolerance Inch M/M | |
| X .015 .30 | |
| .XX .010 .10 | |
| .XXX .005 .05 | |
| Draw | FANNIE 08/29/11' |
| Title | |
| Mini DisplayPort-Mini DisplayPort CABLE(V1.2) | |
| Customer P/N | |
| App'd | Customer: T-RAG |
| Scale NONE | Units M/M |
| Dwg No. 200-1448 | REV:B |
| Sheet 1/1 | |

Rotronic Co., LTD.