


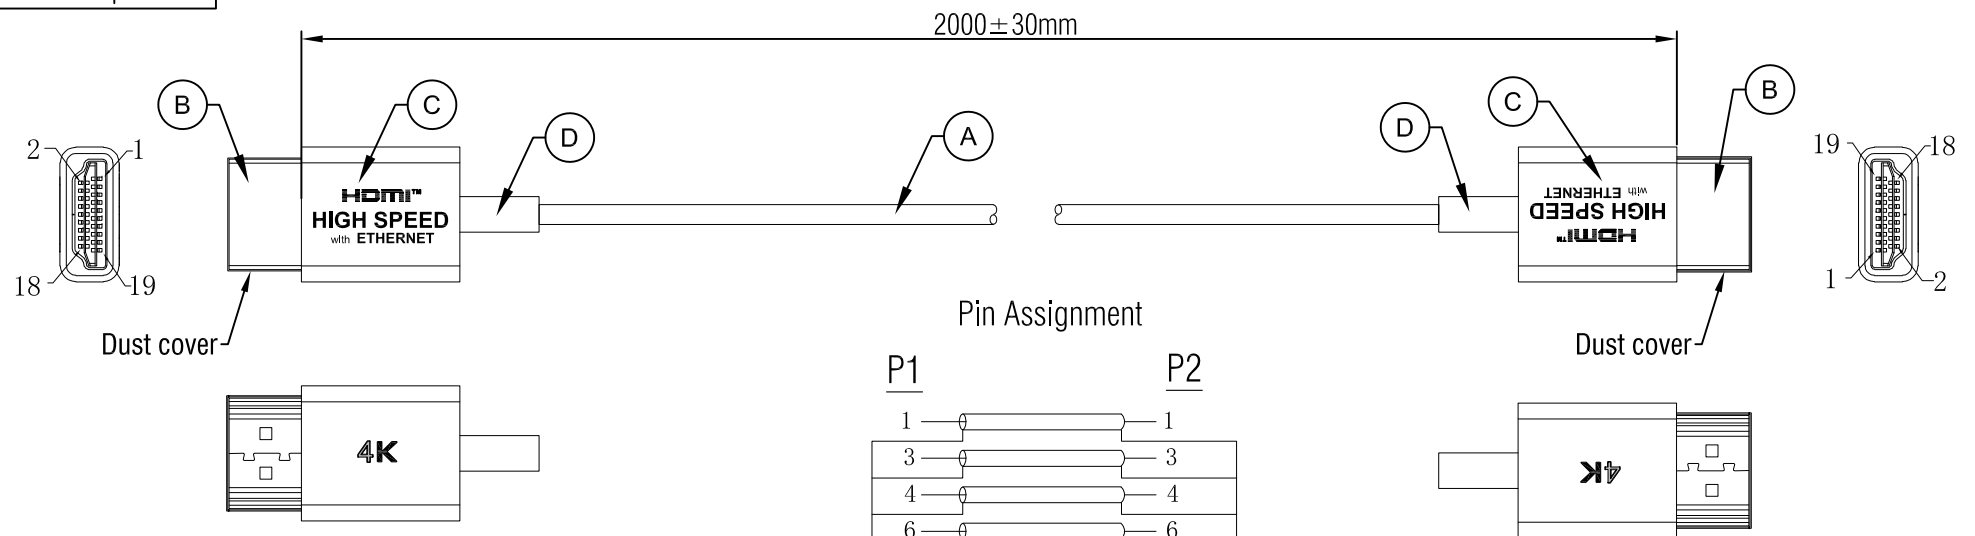

Pin Assignment



P1	P2
1	1
3	3
4	4
6	6
7	7
9	9
10	10
12	12
13	13
14	14
15	15
16	16
18	18
19	19
2,5,8,11	2,5,8,11
17,Shell	17,Shell

Electrical Test:


- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.
- 5.Real Test Passed 3840*2160P 60Hz
- 6.Real Test Not Twinkling,Double Vision and Decolor.

D	45P PVC BLACK		G	ROLINE HDMI 2.0 COAXIAL ULTRA SLIM CABLE, 4K60HZ, 2.0M			SECOMP				
C	HDMI GRAY Aluminum shell			Item	11.04.5938						
B	HDMI 19P MALE(Black Insulator, Nickel Plated)	2	PCS	Draw	<i>Kobe</i>	Date: 2024.09.06					
A	(38#*1C+S)*8C+36*6C+S,OD=2.5mm, BLACK TPE JACKET.	1	PCS	Approval							
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	BOM.NO:xxxxx					
				Sample NO.	RLA240605-2		Drawings of 1 (2)	Proportion: 1:1	Unit(mm)		A4


RoHS Compliant

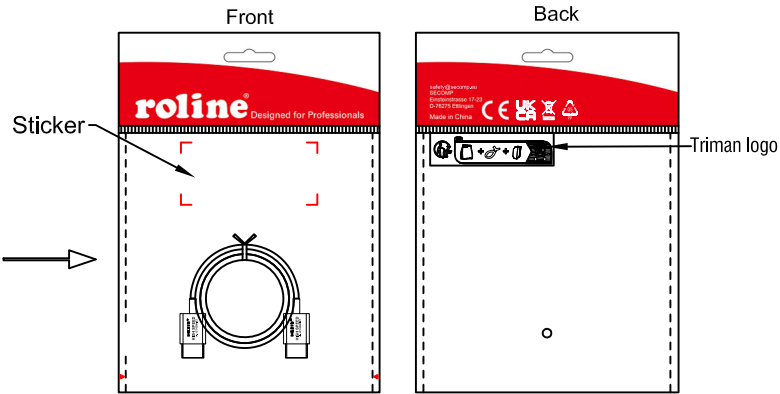

1PCS/RLA BAG-S(0.15*110*205mm)+ Sticker


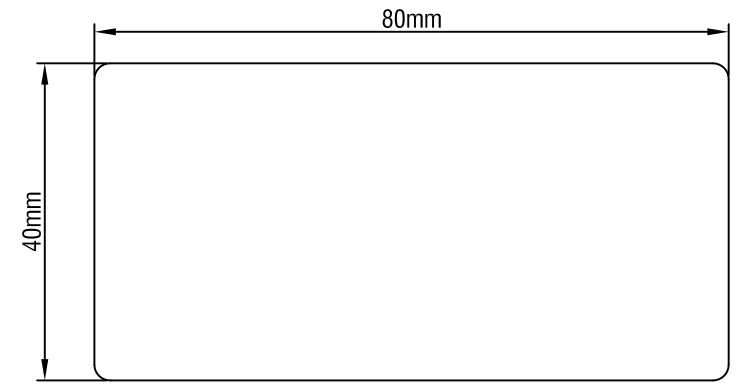


Sticker

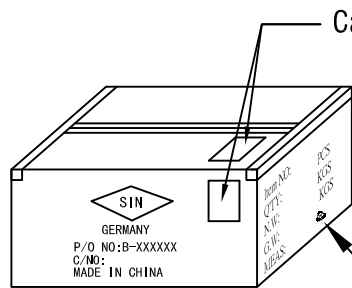


Box
(150*136*95mm)
5PCS/CTN


Carton Sticker(2cm distance from edge of carton)

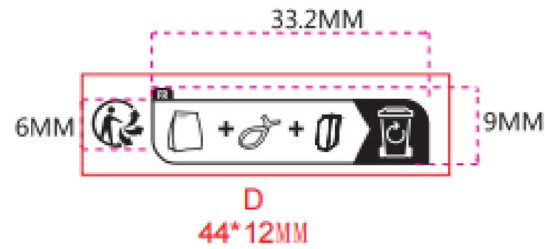

Triman logo

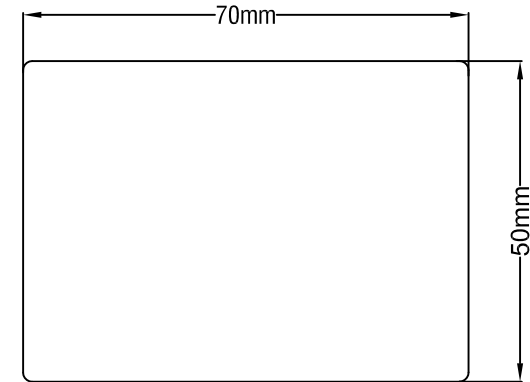

Carton Sticker

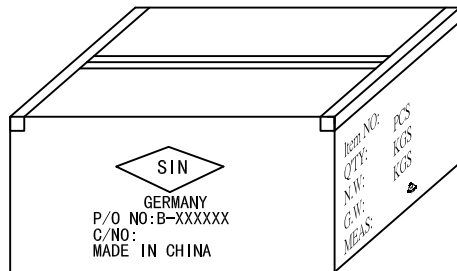

Carton Size:
(440*330*220mm)
60PCS/CTN

ROLINE HDMI 2.0 COAXIAL ULTRA SLIM CABLE, 4K60HZ, 2.0M			SECOMP			
Item	11.04.5938					
Draw	<i>Kobe</i>	Date: 2024.09.06				
Approval						
Duty	F16	BOM.NO:xxxxx				
Sample NO.	RLA240605-2	Drawings of 2 (2)	Proportion: 1:1	Unit(mm)		A4