

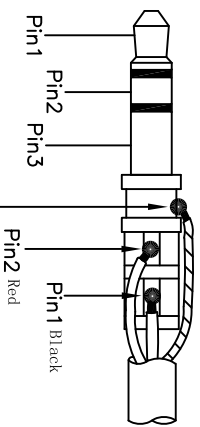


2000 ± 30MM

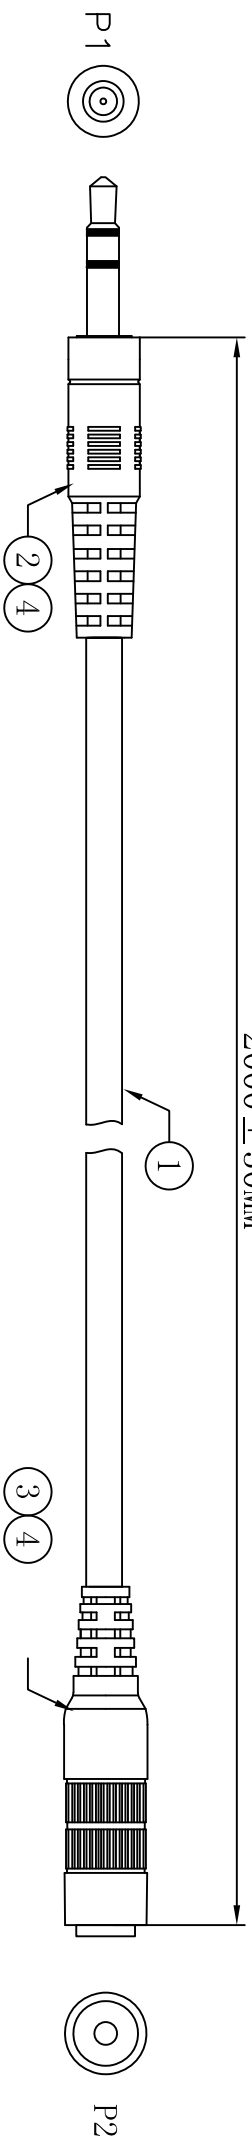

Pin Assignment

P1	P2
1 Black	1
2 Red	2
3 S	3



Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

Mold Number:

DC M	Mold Number:	DCW279-D-4-02-CE
		DCN279-D-4-02-CE
DC F	Mold Number:	DCN277-D-4-08-CE
		DCW277-D-4-08-CE

4	PVC~45P~Black	12	9
3	DC3.5 F~OD:8.0MM~Shell Nickel plating	1	pcs
2	DC3.5 M~OD:6.0MM~Shell Nickel plating	1	pcs
1	NO-UJL~28AWG*2C (Red Black) +S~OD:2.8±0.1MM~Black	2.0	m
NO	CELINK P/M	QTY	UNIT

Ø	TOLERANCE
INCHES	M/M
.X	.015 .30
.XX	.010 .10
.XXX	.005 .05

**SECOMP**

DRAWN BY		P/N:		11.09.4352	
CHECK BY		SCALE	NONE	DRAWING NO:	
APPD BY		UNIT	MM	CA1790092	
		DATE	2013.03.16	REV	A0
					1/2

TITLE: ROLINE 3.5mm Extension Cable M/F, 2m