


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm (Max)
3. Insulation Resistance: 10M ohm (Min)
4. Hi-Pot: 300V DC/10ms

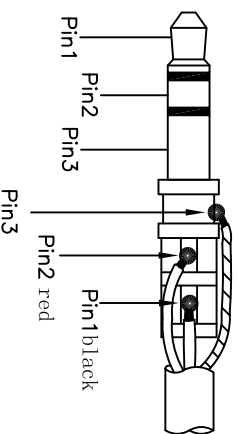

- |    |          |    |
|----|----------|----|
| P1 |          | P2 |
| 1  | Black    | 1  |
| 2  | red      | 2  |
| 3  | entangle | 3  |

Mold number:

|    |  |
|----|--|
| DC | Mold number:<br>DCW279-D-4-01-CE<br>DCN279-D-4-02-CE |
|----|--|

|    |   |             |      |
|----|---|-------------|------|
| 3  | 45P Black PVC                                 | 10          | g    |
| 2  | DC3.5 M OD:6.0MM Shell                        | 2           | pcs  |
| 1  | NO UL 28AWG*2C (red, black) +S OD:2.8MM BLACK | 2           | m    |
| NO | CELINK P/N                                    | DESCRIPTION | Q'TY |

|                                    |           |                        |          |
|------------------------------------|-----------|------------------------|----------|
|                                    | TOLERANCE | <b>SECOMP</b>          |          |
|                                    | INCHES    |                        | M/M      |
|                                    | .X        |                        | .015 .30 |
| .XX                                | .010 .10  |                        |          |
| .XXX                               | .005 .05  |                        |          |
| DRAWN BY                           |           | P/N : 11.09.4502       |          |
| CHECK BY                           |           | SCALE NONE             |          |
| APPD BY                            |           | UNIT MM                |          |
| DATE 2013.3.18                     |           | DRAWING NO.: CA1790158 |          |
| TITLE: ROLINE 3.5mm Cable, M/M, 2m |           | REV. A0                |          |
|                                    |           | 1/2                    |          |