


- Electrical Test:
1. 100%Test (Open, short, miss wire)
  2. Contact Resistance: 5 ohm(max).
  3. Insulation Resistance: DC 300V/10ms, 10M ohm (MIN)

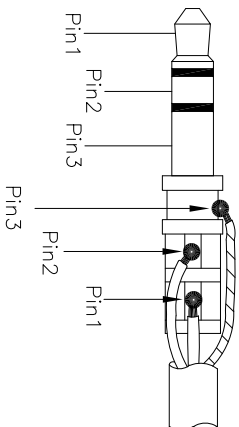

### Pin Assignment

P1	P2
1	1
2	2
3	3

NO	DESCRIPTION	QTY	UNIT	TOLERANCE			TITLE:	P/N :	DRAWING NO.:	REV.
				INCHES	M/M	M/M				
4	PE LDPE	4	g				RDLINE 3.5mm Cable, M/M, 10m	11.09.4510	CA1790105	1/2
3	45P Black PVC	10	g							
2	DC3.5 M OD:6.0MM Shell Nickel plating	2	pcs							
1	NO-UL~28AWG*2C+S~OD:2.8±0.1MM~Black	10	m							
CELINK P/N				APPD BY	DATE	2024.10.15	DRAWING NO.:		CA1790105	REV.
				sh			SCALE		NONE	MM
				XXX	.005	.05	UNIT		MM	AO
				.XX	.010	.10	DATE		2024.10.15	
				X	.015	.30	DRAWN BY		sh	

