



Datenblatt - Fiche technique - Data sheet

11.88.5561




ROLINE GOLD HDMI High Speed Kabel, ST-ST, 1,0m

ROLINE GOLD Câble HDMI High Speed, M-M, 1,0m

ROLINE GOLD HDMI High Speed Cable, HDMI M - HDMI M, 1 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△1	B	ECR # 100330-4 EDIT BAR CODE NO.	03/30/10'

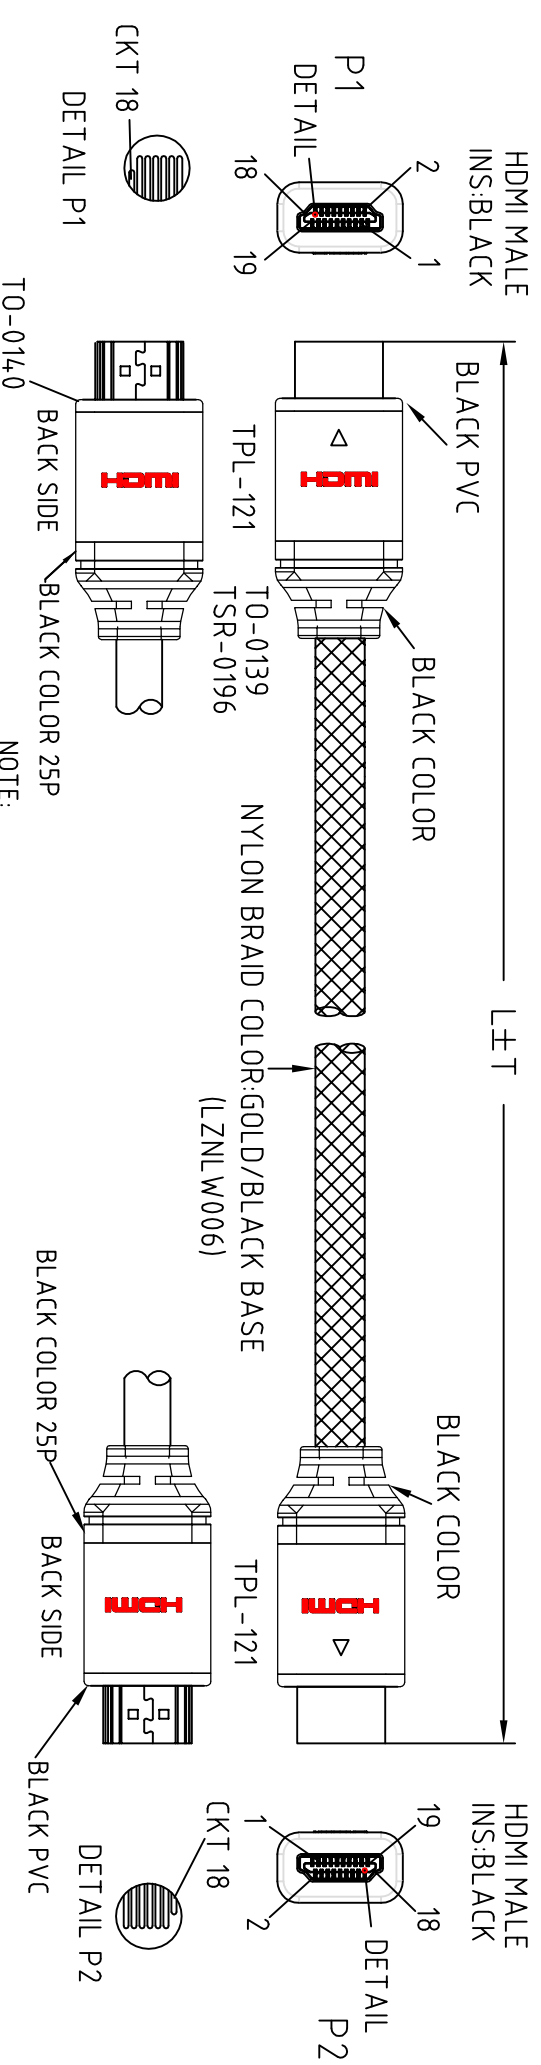

NOTE:

- CABLE: UL-20276 [28AWG(7/0.127 T.C)×1P INS:FOAM-SKIN-PE+D.W(7/0.127 T.C)+Free-Edge-Foil/Mylar]×4C +28AWG(7/0.127 T.C)×1P INS:HD-PE+28AWG(7/0.127 T.C)×5C INS:HD-PE+AL/MY+B.D (85%) PVC JACKET OD:6.6±0.19mm COLOR:BLACK(KNK-K01).
CABLE MUST PRINT: High Speed HDMI™ Cable
- CONNECTOR:
P1&P2: HDMI 19P MALE W/PCB CONTACT: 15u" ; GOLD FLASH (1.8u") SHELL.
3.SHEILD:INNER MOLD MUST BE WRAPPED COPPER 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID
4.HOOD: P1&P2:ASSY TYPE, ALUMINUM HOOD GOLD PLATED,
SR:MOLDED TYPE,PVC 45P,COLOR:BLACK(KNK-K01) .
5.ELECTRICAL TEST:100% OPEN SHORT & MIS WIRE TEST.
CONTACT RESISTANCE 3 ohm Max .
INSULATION RESISTANCE 10M ohm Min .
HI-POT DC300V
- PACKING: EACH PC/POLYBAG+BIG HEADER CARD+BARCODE LABEL.

HDMI P1	PIN OUT	HDMI P2	CABLE FUNCTION
1		1	TMDS DATA 2+
2		2	TMDS DATA 2-
3		3	TMDS DATA 1+
4		4	TMDS DATA 1-
5		5	TMDS DATA 0 SHIELD
6		6	TMDS DATA 1+
7		7	TMDS DATA 0+
8		8	TMDS DATA 0-
9		9	TMDS DATA 0 SHIELD
10		10	TMDS CLOCK +
11		11	TMDS CLOCK -
12		12	TMDS CLOCK SHIELD
13		13	DDC DATA
14		14	DDC DATA
15		15	RESERVED (IN CABLE BUT N.C.ON DEVICE)
16		16	DDC/CYC GROUND
17		17	+5V POWER
18		18	HOT PLUG DETECT
19		19	GROUND

200-1310-4	200-1310-3	200-1310-2	200-1310-1
11.04.5565	11.04.5563	11.04.5562	11.04.5561
5000	3000	2000	1000
50	30	30	20
10	20	20	20
7611990189663	7611990189656	7611990189649	7611990189618

Tolerance Inch M/M	Customer P/N:	App'd	Customer: T-RAG
.X .015 .30	FANNIE 03/30/10'	Scale NONE	Third Angle Projection
.XX .010 .10	Customer P/N:	Units M/M	REV:B
.XXX .005 .05	High Speed HDMI with Nylon Braid Cable	Dwg No. 200-1310	Sheet:1/1
Draw			
Engr			

Rotronic co., LTD.