
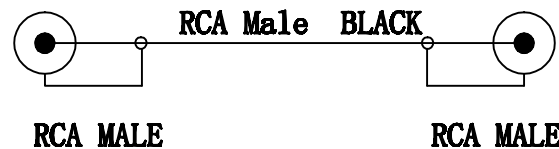


item No.	length	Inner carton packing quantity
11.99.4332	2.5m±20mm	50pcs
11.99.4335	5m±30mm	30pcs
11.99.4339	10m±100mm	20pcs

SPECIFICATION

WIRING DIAGRAM

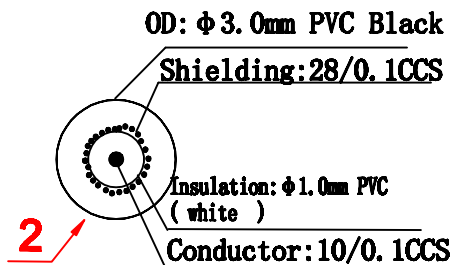

NO.	PARTS NAME	SPECIFICATION STANDARD	QTY
3	MOULDED1	PVC 45P black	2*10g
2	CABLE	AUDIO CABLE Black	L
1	CONNECTORS	RCA Male Nickel Plated	2PCS

1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. INSULATION RESISTANCE: 100Meg Ohm.
3. WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
4. OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
5. 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED _____ DATE: _____
 SAMPLE APPROVED PER _____ DATE: _____
 DRAWING SPECIFICATIONS _____

	NAME	SECOMP
SCALE	VALUE Cinch Cable, simplex M - M, black	
SHEET	ITEM NO.	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		
.X ±	.XX ±	CUS. P/N
.XXX ±	ANGLES ±	1RCA M TO 1RCA M
REV. 00	CUS. REV	DRAWING NO .
		MW-SIN -001
		ENG. DATE
		CHECKED DATE
		APPROVED DATE

01	NEW ISSUE	2018.03.22
REV.	MODIFY DESCRIPTION	DATE