



item No.	length	Inner carton packing quantity
11.99.4363	3m±20mm	50pcs
11.99.4365	5m±30mm	30pcs
11.99.4369	10m±100mm	20pcs

WIRING DIAGRAM

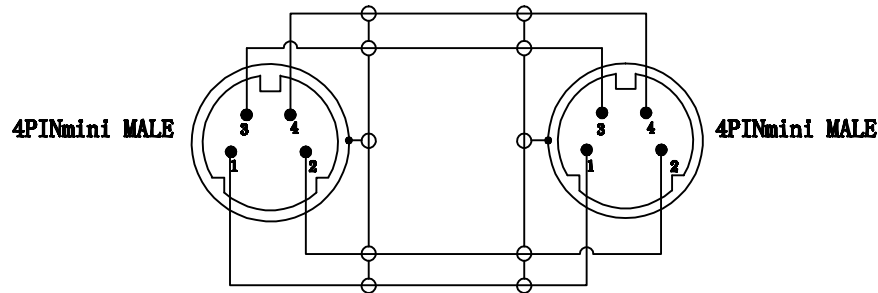

SPECIFICATION

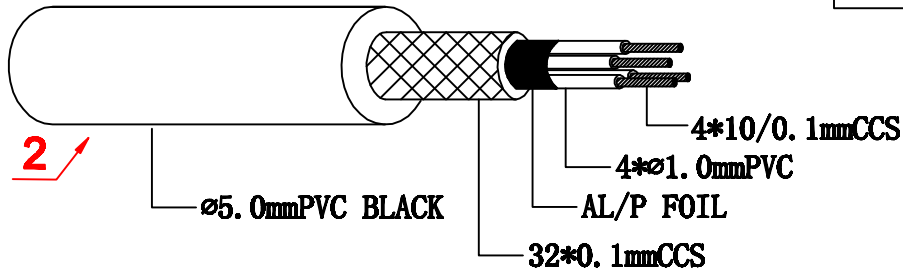

NO.	PARTS NAME	SPECIFICATION STANDARD	QTY
3	MOULDED1	PVC 45P black	2*15g
2	CABLE	4C AUDIO CABLE Black	L
1	CONNECTORS	MD4PIN Male Nickel Plated	2PCS

1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. INSULATION RESISTANCE: 100Meg Ohm.
3. WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
4. OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
5. 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED _____ DATE: _____
 SAMPLE APPROVED PER _____ DATE: _____
 DRAWING SPECIFICATIONS

 SCALE NONE SHEET 1/1 DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .X ± .XX ± .XXX ± ANGLES ± REV. 00 CUS. REV	NAME VALUE S-Video Cable M-M, black ITEM NO. 11.99.4363/11.99.4365/11.99.4369 CUS. P/N VHS CABLE DRAWING NO. MW-SIN -008	 ENG. DATE CHECKED DATE APPROVED DATE
---	---	--

01	NEW ISSUE	2018.03.22
REV.	MODIFY DESCRIPTION	DATE