

TOSLINK(ASSEMBLY TYPE)

1. PLASTIC FIBER CORR (PMMA):OD=0.98mm
2. CLAD (FLUORD FLYMBR):OD=1.0mm
3. PRIMARY JACKET PE,OD=2.2mm (BLACK)
4. OUTER JACKET PVC, OD=3.0mm(BLACK)

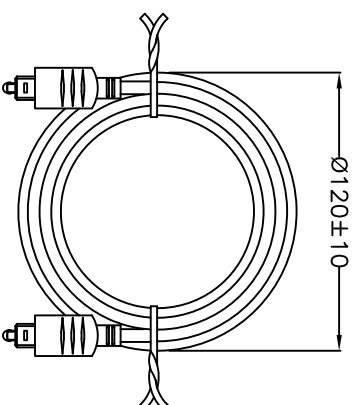


Chart A

NOTES:

1. Cable Spec.:
Cable Specification See Chart A
Plastic Fiber Optical
2. Electronic Test:
1>. Insertion Loss: 2.0dB_ L<2M; ADD 0.2dB/M,L>2M
(Test BY650±30mm LED Light Source/Power Meter)
2>. Temperature Test: <3.5dB
3>. Packing: Bulk

| NO | DESCRIPTION | Q'TY | UNIT | APPD | BY | DATE | P/N : | SCALE | UNIT | MM | DRAWING NO.: | REV. |
|----|----------------------------|------|------|------|----|------------|------------|-------|------|----|--------------|------|
| 1 | Toslink cable OD:3.0 BLACK | 1 | PC | | | 2013.03.18 | 11.99.4382 | NONE | | | B11-CC001561 | A0 |
| | | | | | | | | | | | | 1/1 |

| SYMBOL | TOLERANCE | INCHES | M/M |
|--------|-----------|--------|-----|
| ⌀ | | .015 | .30 |
| .X | | .010 | .10 |
| .XX | | .005 | .05 |
| .XXX | | | |

| | | | |
|----------|--|--------------|--|
| DRAWN BY | | P/N : | |
| CHECK BY | | SCALE | |
| APPD BY | | UNIT | |
| | | NONE | |
| | | MM | |
| | | DRAWING NO.: | |
| | | B11-CC001561 | |
| | | REV. | |
| | | A0 | |
| | | 1/1 | |

| | |
|-------------------------------|--|
| TITLE: | |
| VALUE Toslink Cable M-M, 2.0m | |