



Datenblatt - Fiche technique - Data sheet

11.99.5564





VALUE Verlängerungskabel DVI, DVI ST-BU, (24+1) dual link, 3,0 m

VALUE Câble DVI, DVI M-F, (24+1) dual link, 3,0 m

VALUE Monitor DVI Cable, DVI (24+1), Dual Link, M/F, 3.0 m

L (MM)

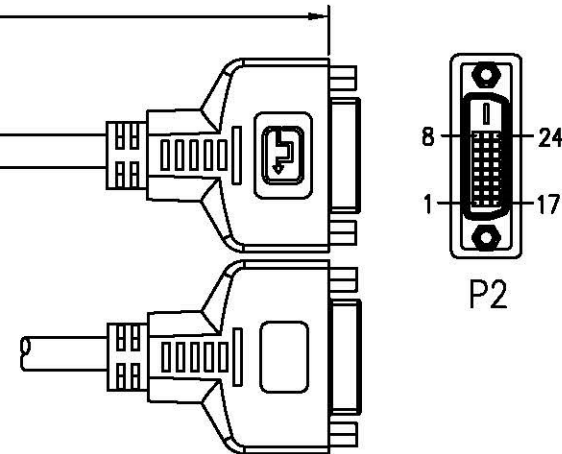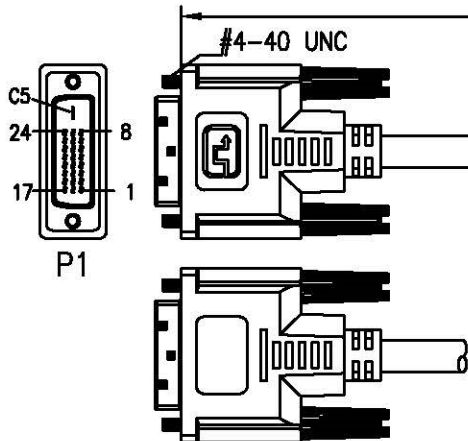

P/N CHART

MODEL NO.	L(mm)
11. 99. 5562	1000±30
11. 99. 5563	2000±50
11. 99. 5564	3000±50

NOTES:

1. MATERIAL

1.1 HDMI CABLE: (7/0.10TC*1P+7/0.10CCS+AM)*7PCS+7/0.12TC*3C+7/0.12TC*1P+AM+7/0.12CCS+128/0.12ALM+PVC BLACK JACKET
 OD: $\varnothing 7.3 \pm 0.2$ mm
 CABLE MARKING: VW-1 DVI CABLE 80°C 30V

1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS NICKEL PLATED SHELL.

1.3 THUMB SCREW TO BE MOLDED BLACK PVC. GOLD PLATED SCREW.

1.4 ALL HOOD: MOLDED BLACK PVC.


2. ELECTRICAL

2.1 100% OPEN AND SHORT TEST

2.2 CONDUCTOR RESISTANCE: 15 OHMS MAX

2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN

3. ALL MATERIALS ARE ROHS 2.0 AND REACH COMPLIANT.

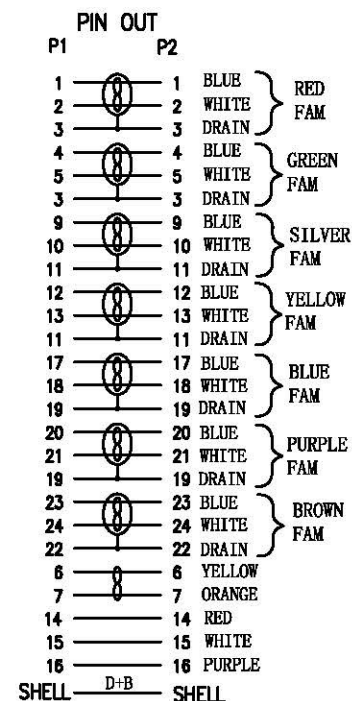

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME:
ANGLE TOLERANCE: X' $\pm 3'$.X' $\pm 1'$	UNIT: mm	
	VERSION: 00	
	PAGE: 1/1	

SECOMP

ENG: Zhy

PRODUCT NO:

CUSTOMER NO:
SEE THE P/N CHART

CHECKED: Yico

00	NEW ISSUE	2016-3-27
REV.	MODIFY DESCRIPTION	DATE

DRAWING NO: HF2107

PRODUCT DESCRIPTION:
DVI 24+1 M/M/NICKEL-PLATED

APPROVED: Sally