



RoHS Compliant

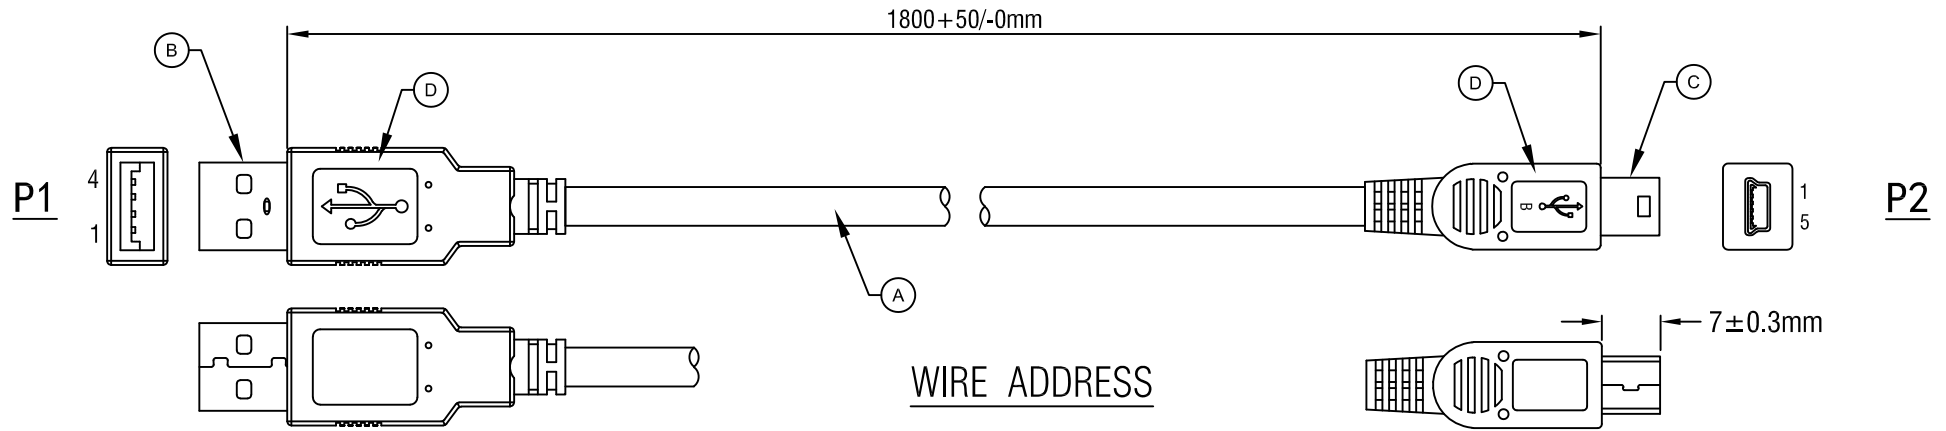

WIRE ADDRESS

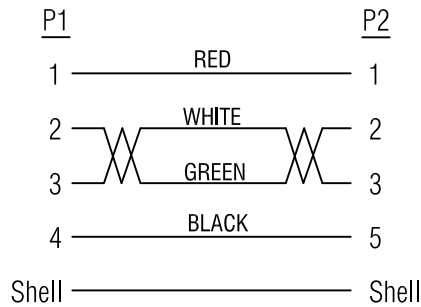

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Sample NO.	Drawings of 1 (1)	Proportion: 1:1	Unit(mm)	A4
D	45P PVC WHITE		G	VALUE USB2.0 CABLE, A-5-Pin Mini,M/M,1.8M				
C	USB 2.0 Mini B5P MALE(Black Insulator,SHELL Nickel Plated,PIN Gold Plated 30")	1	PCS	Item	11.99.8718			
B	USB 2.0 A MALE(White Insulator, SHELL Nickel Plated,PIN Gold Plated 30")	1	PCS	Draw	Sam	Date: 2014.11.28		
A	UL2725 28AWG*1P+28AWG*2C+AB OD:3.5mm WHITE COLOR PVC JACKET	1	PCS	Approval				
				Duty	F16			

**SECOMP**