
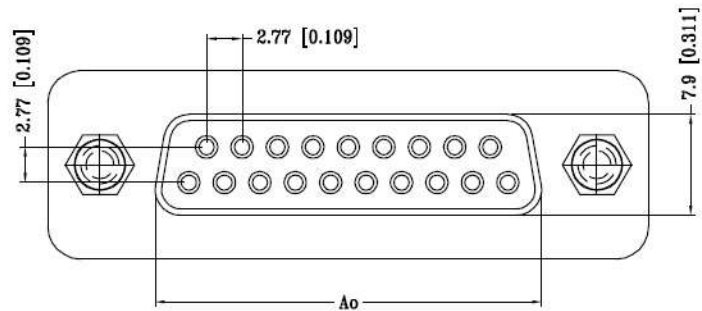
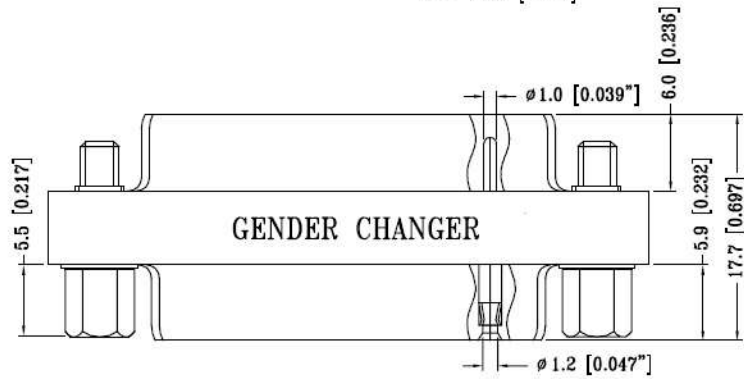


REV.	ECN NO. / DESCRIPTION	DATE

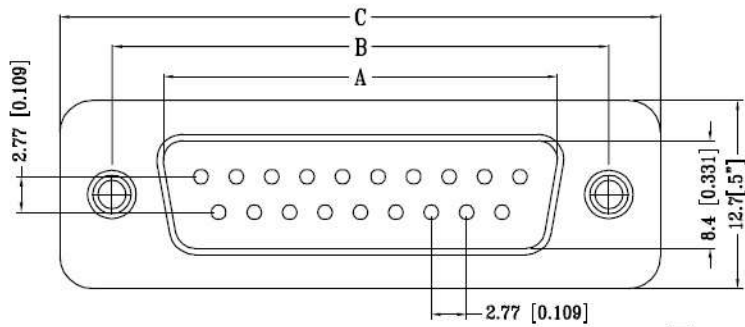

## MATERIAL

INSULATOR: BLUE PBT UL94 V-0 RATED  
 CONTACTS: BRASS  
 SHELL: STEEL

## FINISH

CONTACTS: GOLD FLASH OVER NICKEL  
 SHELL: NICKEL PLATED

## ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE: 25mΩ MAX  
 CURRENT RATING: 5 AMPERES  
 INSULATION RESISTANCE: 5000MΩ MIN  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC 60SEC

PART NO.	Circuits	A	B	C
12.03.2005	25	38.9(1.531")	47.0(1.85")	53.3(2.098")

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	<b>SECOMP</b>			
.X ±0.30	X° ±3°	12.03.2005	TITLE ROLINE Mini Gender Changer 25-pin M-M			
.XX ±0.15	X° ±1.5°	APPROVE Ted Ju 07/02 '04				
.XXX ±	XX° ±	CHECK Ted Ju 07/02 '04	DWG NO. LAP-A1615CB2L			
CUSTOMER DRAWING		DRAW C.C.S 07/02 '04		SHEET	SCALE	REV
SIZE	UNITS			1 / 1	1:1	1
A4	MM [INCH]					