



Datenblatt - Fiche technique - Data sheet

12.99.3134




VALUE DisplayPort-HDMI Adapter, DP Stecker-HDMI Buchse


VALUE Adaptateur DisplayPort - HDMI, DP M-HDMI F

VALUE Cableadapter, DP M - HDMI F

Customer P/N: XXXXXXXXXXXXXXXX RXX

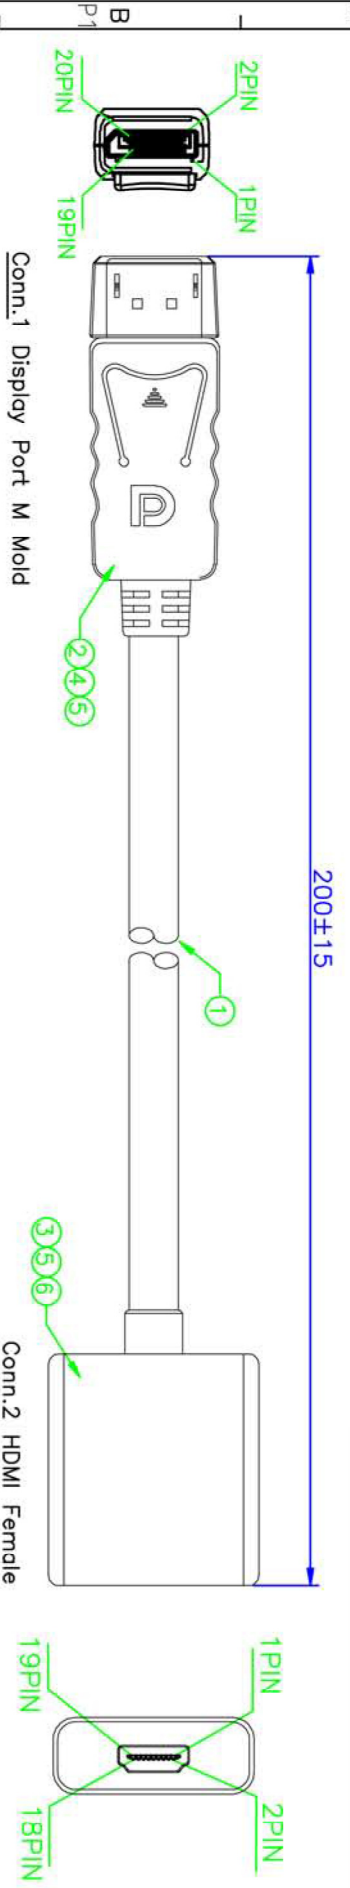

PIN Assignment

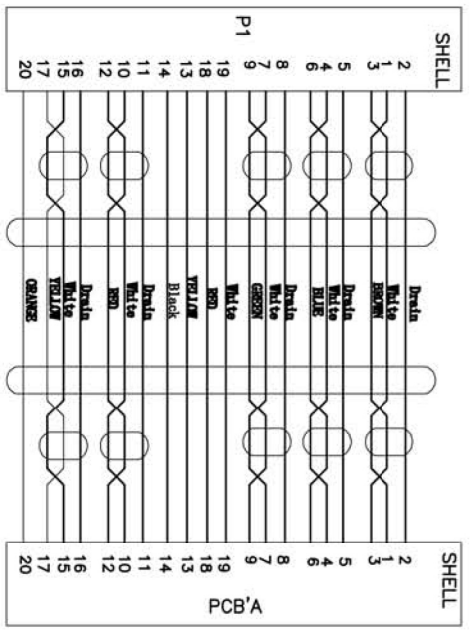

- 1.1 Features
- Support DisplayPort 1.1a input and HDMI output.
- Support HDMI highest video resolution 1080p.
- Support HDMI 225MHz/2.25Gbps per channel (6.75Gbps all channel) bandwidth.
- Support HDMI 12bit per channel (36bit all channel) deep color.
- Supports uncompressed audio such as LPCM.
- Powered from DisplayPort source

⑥	Plastic Hood for HDMI Female, Material: ABS, Color:Black	1	Set
⑤	Outside Molding 45P PVC PMS:Black	12	9
④	Inside Molding: PE	4	9
③	DisplayPort to HDMI PCB+SMT	1	pcs
②	DisplayPort Male Pin Gold,Insulation Black,Shell Nickel Plated	1	Set
①	DisplayPort Cable UL20276 [32AWG(7/0.08TC)*1P+D+AL+Mylar)*5+32AWG(7/0.08TC)*5C+AL/MY+D.W+BD+Jacket Color PMS:Black OD:5.0±0.2mm	0.15	m

NO.	DESCRIPTION	Q'TY	UNIT
-----	-------------	------	------

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL.±										APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	
				RANGE	Pld	Met	Ins	Por	Cab	Pac	Gas	DIS	DIS						DIS
△				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2							
△				6~30	0.1	0.1	0.1	0.15	0.25	1	0.5	0.25							
△				30~80	0.1	0.15	0.2	0.3	2	1.5	1	0.3							
△				80~180	0.15	0.15	0.25	0.3	2	2	1	0.45							
△				180~315	0.15	0.2	0.3	0.4	2.5	2	1	0.6							
△				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1							

ro-tronic

Display Port to HDMI Female Adapter
 DATE: 2013-07-20
 PART NO.: MF
 R00