


Note:

- 1. ROHS 2.0 & REACH Compliant
- 2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2
- 3. Min. Bending Radius: Static: 20mm, Dynamic: 40mm

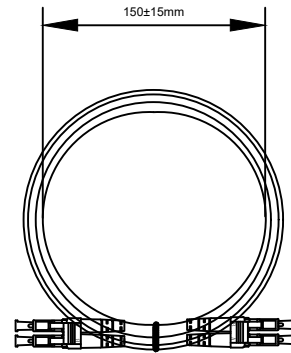

Test:

Grade Designation: Each to Reference

TYPE	MULTI-MODE
Insertion Loss	≤0.15dB (IEC 61300-3-4)
Return Loss	≥30dB (IEC 61300-3-6)
Test Wavelength	850nm

⑧	Ring 1 2 Yellow	4pcs	
⑦	Black Heat Shrink Tube	2pcs	
⑥	LC MM Erika violet Clip	2pcs	
⑤	LC Dust Cap White	4pcs	
④	LC Erika violet Duplex Connector	4pcs	
③	LC White Boot	4pcs	
②	LC Ferrule 126-128um	4pcs	
①	Fiber Optical Cable Duplex ϕ 2.0mm OM4 50/125um Erika violet LSZH	L+0.1m	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK

21.99.8837	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 20m
21.99.8836	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 15m
21.99.8835	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 10m
21.99.8838	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 7m
21.99.8834	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 5m
21.99.8833	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 3m
21.99.8832	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 2m
21.99.8831	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 1m
21.99.8830	VALUE FO Jumper Cable, 50/125 μ m OM4, LC-LC, Low-Loss, 0.5m
ITEM NO.	DESC.

		Add Min. Bending Radius	2022-1-24	A1
		NEW	2021-07-09	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP