
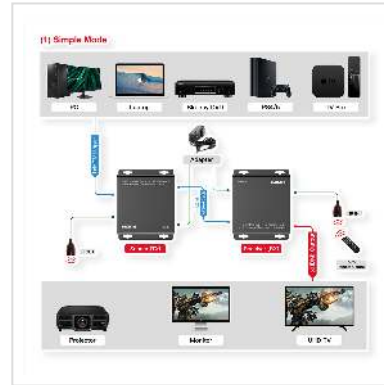


ROLINE HDMI over IP Extender, 4K30Hz, 120m, W/IR

Product No.	14.01.3642
Manufacturer	ROLINE
Manufacturer No.	14.01.3642
EAN (single piece)	7630049633391

roline
Designed for Professionals

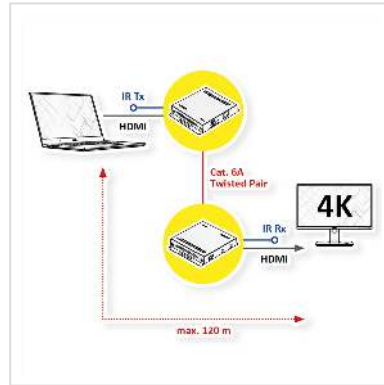

2160p

4K

With this HDMI over IP Extender, you can extend HDMI signals up to 120 m with 4K@30Hz via a network cable of Cat. 5e or higher. An ideal solution for sharing a screen or projector over a LAN network. IR signals from a remote control of the video source can also be redirected - perfect for controlling your video source from your video destination.

Suitable for advertising, studios, multimedia classrooms, etc.

- Following TCP/IP standard
- Supports resolutions up to 4K@30Hz
- Max. distance is 120m
- Supports max video bandwidth of 3.4Gbps/340MHz per channel (10.2 Gbps all channels)
- Cat5e/6 cable needs to follow the standard of IEEE-568B
- Features IR return, which enables you to control the video source from your video destination
- Features 2 extension modes: simple mode (1:1) and allocation mode (1:N)
- Stable metal casing
- Dimensions: TX/RX: 24 x 94 x 120 mm
- Weight: TX/RX: 214 g
- Contents: 1x Transmitter, 1x Receiver, 2x Power Supply (TX: 1x 5 VDC 1A, RX: 1x 5VDC

Technical specifications	
Manufacturer	ROLINE
Product group	Splitters and selectors
Product type	HDMI Extender
Colour	black
Scope of delivery	1x Transmitter, 1x Receiver, 2x Power Supply (TX: 1x 5 VDC 1A, RX: 1x 5 VDC 1A), User Manual
Interface	HDMI
Audio	HDMI
Inputs	1
Outputs	1
Max. distance	120 m
Video input	HDMI
Audio input	HDMI
Video output	HDMI
Audio output	HDMI
Video band width	10.2 Gbps
Max. resolution (nom.)	3840 x 2160 @30Hz
Max. resolution	3840 x 2160 @30Hz (4K, Full HD)
Dimensions (HxWxD)	TX: 24 x 94 x 120 mm, RX: 24 x 94 x 120 mm
Power supply unit	2x
Power supply output	DC 5V 1A
Technical particularity	Extends the signal up to 120m
Operating temperature min.	0 °C
Operating temperature max.	50 °C
Height	24 mm
Width	94 mm

Depth	120 mm
Weight	428 g
Height of packaging (single piece)	60 mm
Width of packaging (single piece)	230 mm
Depth of packaging (single piece)	300 mm
Package weight (single piece)	1 kg