


# ROLINE S/FTP Patch Cord Cat.6A / Class EA, LSOH, Slim, PoE, grey, 1.5 m

<b>Product No.</b>	21.15.4314
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	21.15.4314
<b>EAN (single piece)</b>	7630049634022

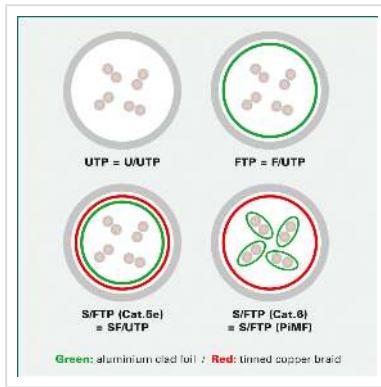

**Cat.6A**  
Class EA

**S/FTP**



**LSOH**

**S/FTP (PiMF) Cat. 6A LSOH Patch Cord with shielded RJ-45 connectors on both sides. PoE-capable although it is slim, flexible and tangle-free.**

- S/FTP (PiMF) LSOH Cat. 6A Patch Cord
- For use in Gigabit Ethernet networks, especially for connecting devices (e.g. IP cameras)
- Slim, flexible and tangle-free
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- Durable due to moulded kink protection
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

## Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)

Colour	grey
Length	1.5 m
Scope of delivery	Patch Cord
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 28
Power over Ethernet (PoE)	yes
Conductor type	Stranded
Bend radius	Min. 27 mm
Locking lever	yes
Anti-kink sleeve	Moulded-on
Colour (Spout)	grey
External cable diameter	4.5 +/-0.2mm
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C
Storage temperature max.	75 °C

Weight	40 g
Height of packaging (single piece)	20 mm
Width of packaging (single piece)	100 mm
Depth of packaging (single piece)	100 mm
Package weight (single piece)	0.036 kg