




MOLDING:  
SF-04F  
SF-82F



DATE	REV.	REVISION	DRAFTING	CHECKED
2022.12.26	A/1	Adding Customer Item NO.	LQF	SZW
2023.04.22	A/2	Conductor specification change	LQF	SZW
2023.09.05	A/3	Increase the material of wire and plug	LQF	

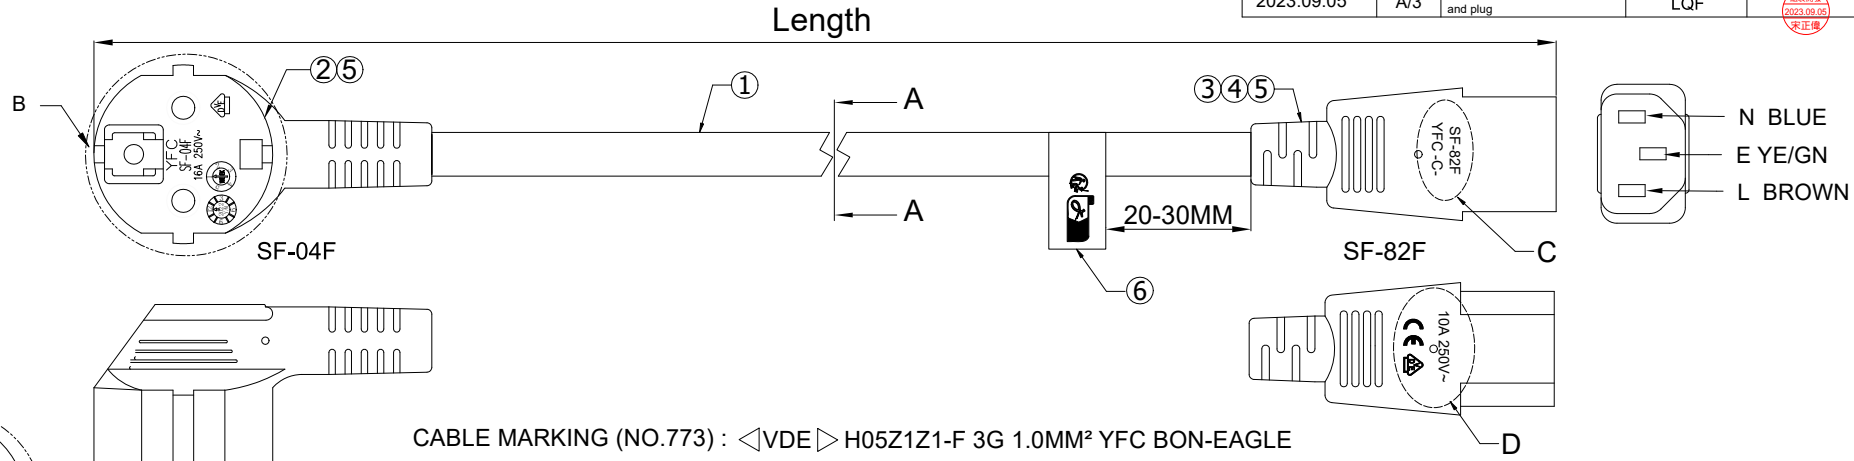


CABLE MARKING (NO.773) : <VDE> H05Z1Z1-F 3G 1.0MM<sup>2</sup> YFC BON-EAGLE

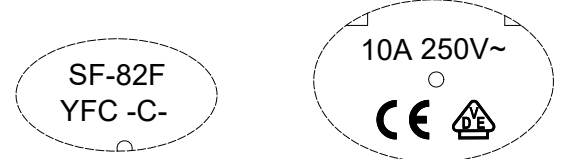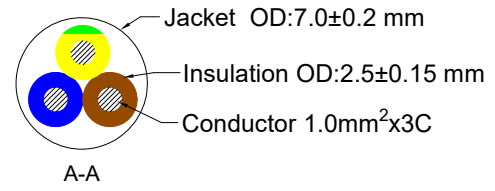

Comply with LSOH standard DIN EN50525-3-11	
Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤19.5Ω/1000m
Voltage Rating	AC 300/500V

Customer Item NO.	Cable Color	Molding Color	Length (MM)
19.44.1002	Black	Black	3000±30
19.44.1007	White	White	3000±30

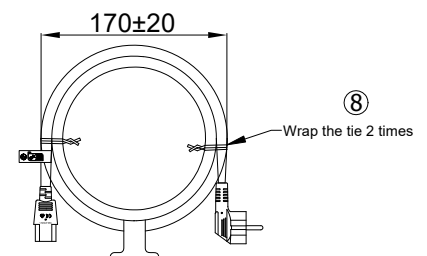

PINOUT			
SF-04F		SF-82F	WIRE
E		E	YE/GN
L		L	BROWN
N		N	BLUE

⑧	Mini TIE	Brown paper tie	2PCS
⑦	Current Label	Stickers provided by customers	1PC
⑥	Current Label	Recycle logo stickers	1PC
⑤	Molding	Molding 40P LSOH(TPE)	AR
④	Housing	SF-82F One piece of inner frame,IEC-C13,Three plug, ABS	1PC
③	Terminal	SF-82F IEC C13 Three plug Female Straight insert Common of terminal,Brass yellow,1.0mm <sup>2</sup>	3PCS
②	Terminal	SF-04F Europe 16A French Head, Riveted 1.0mm <sup>2</sup> LSOH	1PC
①	CABLE	H05Z1Z1-F 3G 1.0MM <sup>2</sup> LSOH(polyolefin resin)	1PC

Unless specified on the drawing, tolerances are per the follows:  
 X. ±0.20 X° ±3  
 .X ±0.10 .X° ±0.3  
 .XX ±0.05



DRAW. NO	GFAC-S220391	TITLE	ROLINE GREEN Power Cable IEC320, 3P Ger-C13, LSOH		
CUSTOMER	--				
CUST' R P/N	--	DRAW	LQF	DATE	2023.09.05
SCALE	1:1	CHECK		DATE	--
UNIT	mm	APPROVED		SHEET	1 of 1

Cable Spec NO.	GFDY-C230057	Part Number	--	Note	RoHS2.0	Reach	GP	HF	Other
1	2	3	4	5	6	7	8	9	10

DRAW. NO	GFAC-S220391	TITLE	ROLINE GREEN Power Cable IEC320, 3P Ger-C13, LSOH		
CUSTOMER	--				
CUST' R P/N	--	DRAW	LQF	DATE	2023.09.05
SCALE	1:1	CHECK		DATE	--
UNIT	mm	APPROVED		SHEET	1 of 1