


MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION
①	CABLE	UTP [24AWG(CCA 7*0.192±0.005mm ) *1PR]4+PE CROSS +LSOH OD:6.0±0.3mm COLOR: Green
②	RJ45 CONNECTOR	RJ45,8P8C, TWO FORK GOLD PLATED CONTACTS
③	MOLDING PVC	MOLDING PVC 50P COLOR:Green

Marking: UTP CAT6 NETWORKING CABLE LSOH 24AWG\*4P ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 IEC 60332-1 IEC 60332-3C

- 1)Jacket Color:Green(RAL 6029)
- 2)Wiring:T568B
- 3)Bending radius: The minimum bending radius is 8 times of the cable diameter

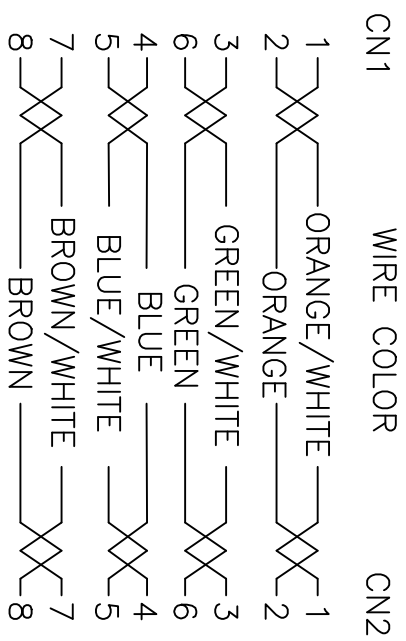

Item No	Length(M)	Tolerance(mm)
21.99.1023	0.5	+20/-10
21.99.1033	1	+/-20
21.99.0253	1.5	+/-40
21.99.1043	2	+/-40
21.99.1053	3	+/-60
21.99.1063	5	+/-110
21.99.1073	7	+/-140
21.99.1083	10	+/-200

ELECTRONIC TEST:  
A.OPEN/SHORT/INTERMITTENCE: 100%.

ITEM NO.	21.99.1023/21.99.1033/21.99.0253/21.99.1043/21.99.1053 21.99.1063/21.99.1073/21.99.1083
DESC	VALUE Cat. 6 UTP Patch Cord, Green
REMARK:NO	CHA NO
DRAWN BY	WEIHAIRYAN
APPROVED BY	MORGAN
DATE	2024.07.31

